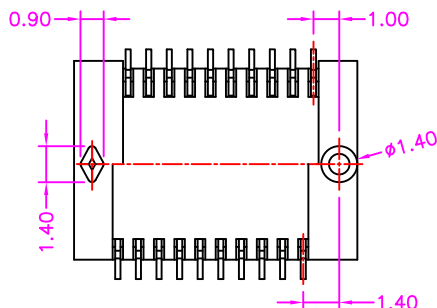
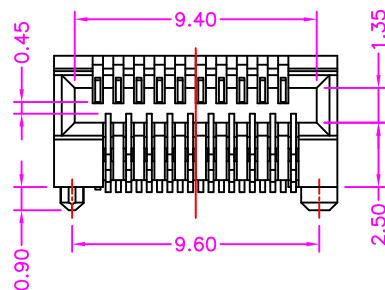
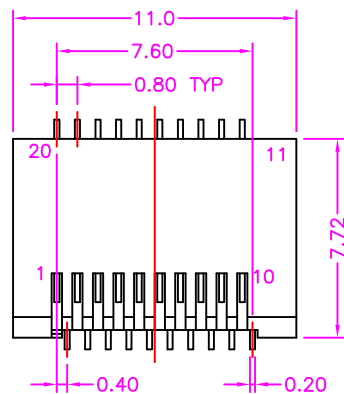


PART NUMBER:
OSCBB - 2 0 * - 1 * 0

SERIES

NO. OF POS.

PACKAGE OPTION
2: TAPE REEL
3: TUBE

CONTACT PLATED OPTION


- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.0 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 40m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

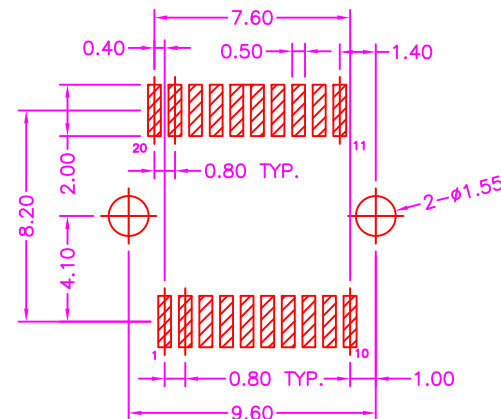

P.C.B. LAYOUT
TOP VIEW ±0.05



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		TITLE	SFP CONNECTOR SERIES					
X.X ±0.3			SFP CONN., PCB MOUNT, SMT, WITH POST					
X.XX ±0.2			DRAWN BY		CHECKED BY		APPROVED BY	
X.XXX±0.1								
Angle ±5°								
		<i>Janice</i>		<i>Lion</i>		<i>Benson</i>		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10055		MM	NONE	A4	OSCBB-001	A	1/1	

A	RELEASE	2011.8.25
REV.	DESCRIPTION	DATE

F

F

E

E

D

D

C


C

B

B


A

A

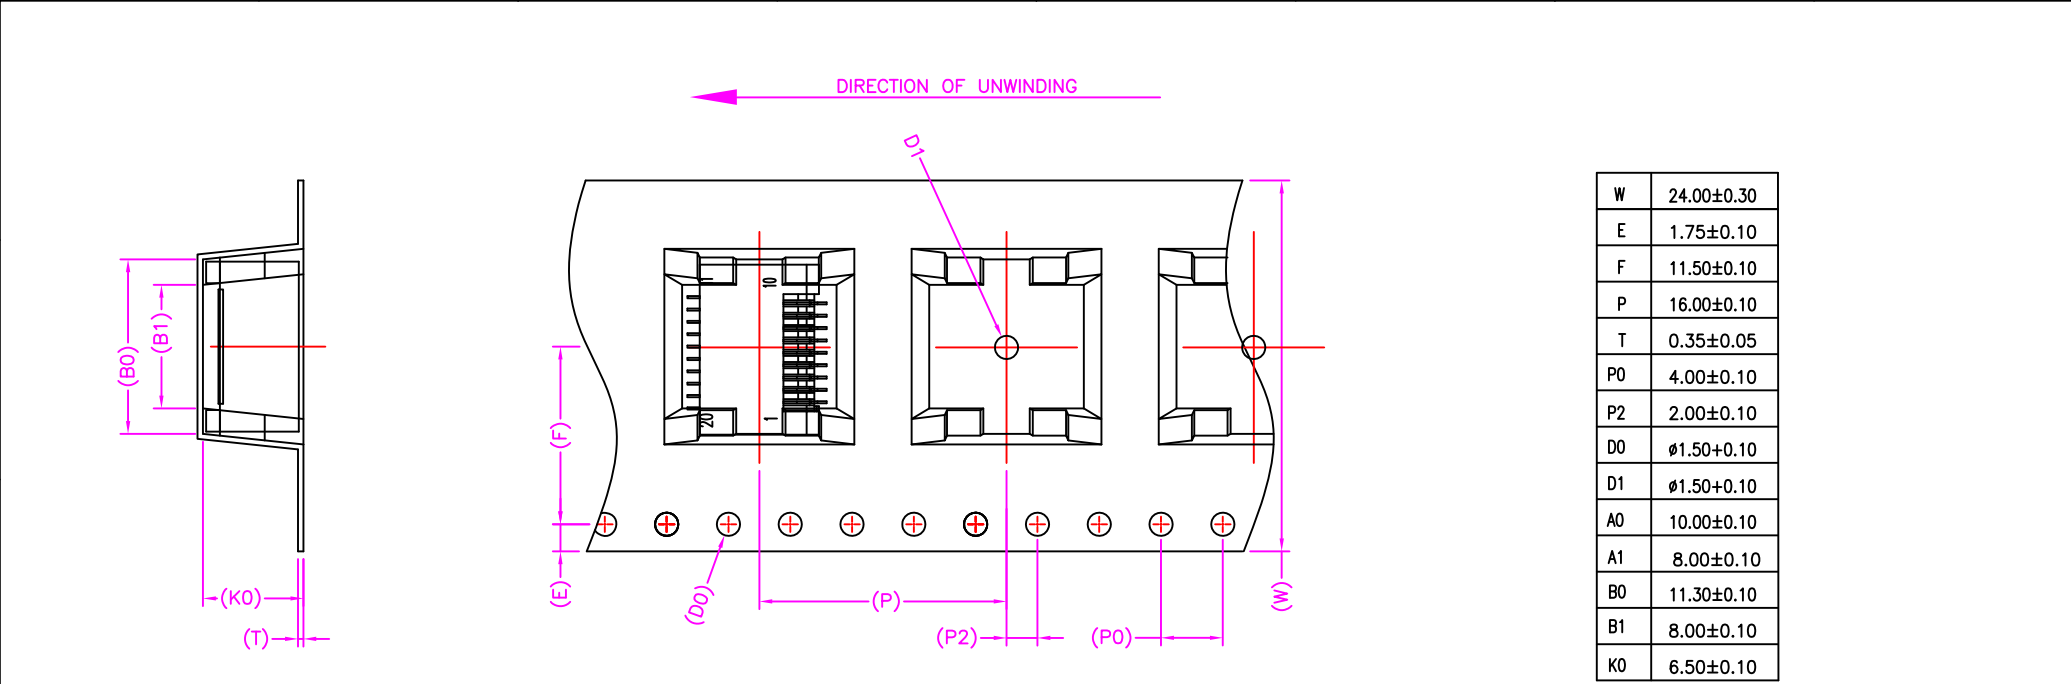

W	24.00±0.30
E	1.75±0.10
F	11.50±0.10
P	16.00±0.10
T	0.35±0.05
P0	4.00±0.10
P2	2.00±0.10
D0	ø1.50±0.10
D1	ø1.50±0.10
A0	10.00±0.10
A1	8.00±0.10
B0	11.30±0.10
B1	8.00±0.10
K0	6.50±0.10

VIEW A-A

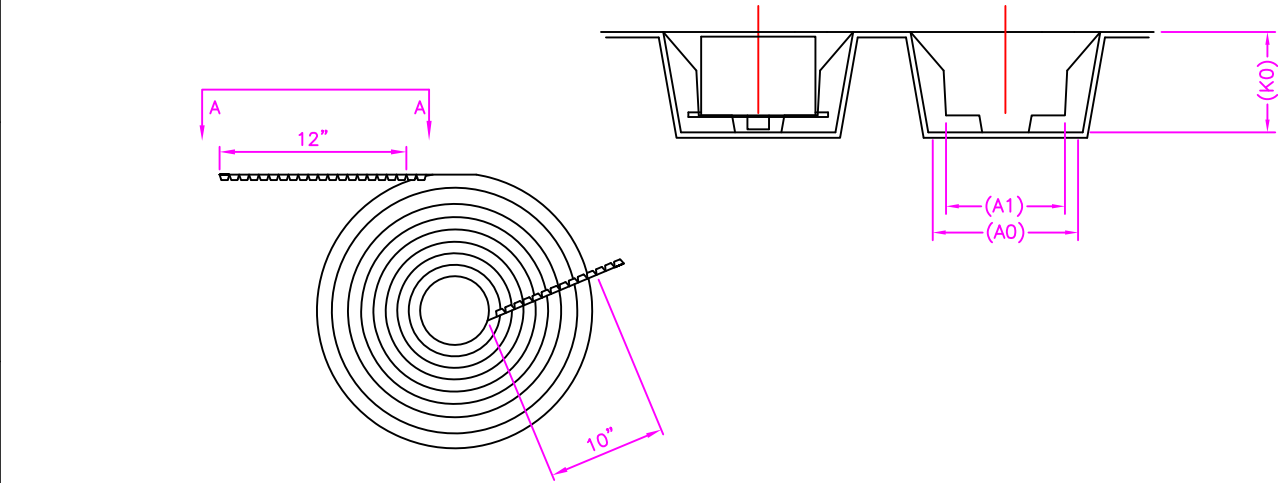

A	RELEASE	2011.8.25
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314							
TOLERANCES		TITLE	SFP CONNECTOR SERIES				
X.X ±0.3			SFP CONN., PACKAGE				
X.XX ±0.2							
X.XXX±0.1							
Angle ±5°			DRAWN BY		CHECKED BY		APPROVED BY
		Janice		Lion		Benson	
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
10055		MM	NONE	A4	0SCBB-001-1	A	1/1