

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)

SHELL: SUS, NICKEL PLATING

TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION





CURRENT RATING: 0.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -20°C~+85°C

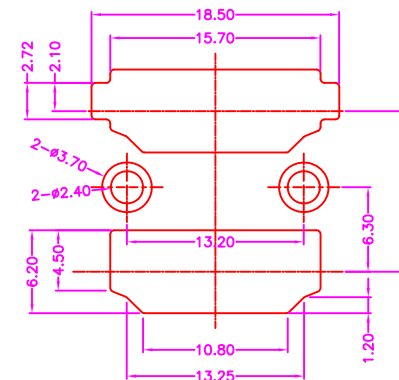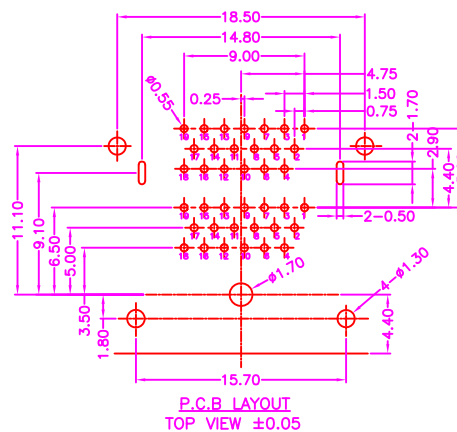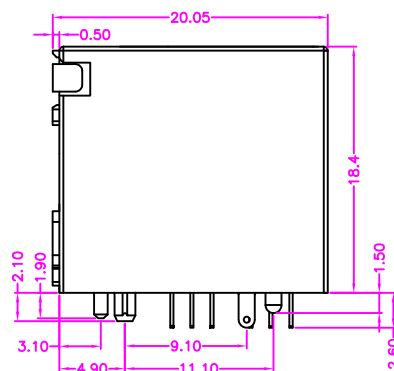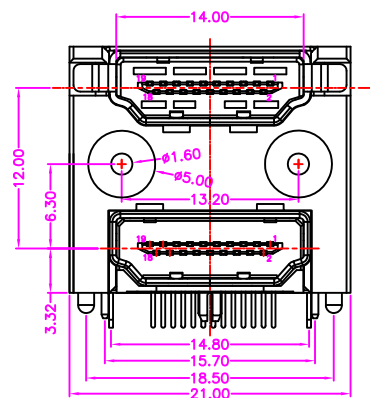

PART NUMBER:

2HDUE - 3 8 * T - 1 1 0

SERIES

NO. OF POS.

TRAY PACKAGE

TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

1: GOLD FLASH

3: 3u" GOLD

5: 5u" GOLD

6: 10u" GOLD



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		HDMI CONNECTOR SERIES							
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE	DUAL HDMI, PCB MOUNT, R/A, METAL SHIELD, FEMALE WITH SCREW & POST						
			DRAWN BY		CHECKED BY		APPROVED BY		
			Janice		Lion		Benson		
			UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10088		MM	NONE	A4	2HDUE-001	A	1/1		

A	RELEASE	2011.8.3
REV.	DESCRIPTION	DATE