

LED OPTION		
P/N	LEFT "A"	RIGHT "B"
0	NONE	NONE
1	YELLOW	GREEN
2	GREEN	YELLOW
3	YELLOW	YELLOW
4	GREEN	GREEN

TABLE 1




MATERIALS

HOUSING: PBT (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

USB
CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

RJ45
CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

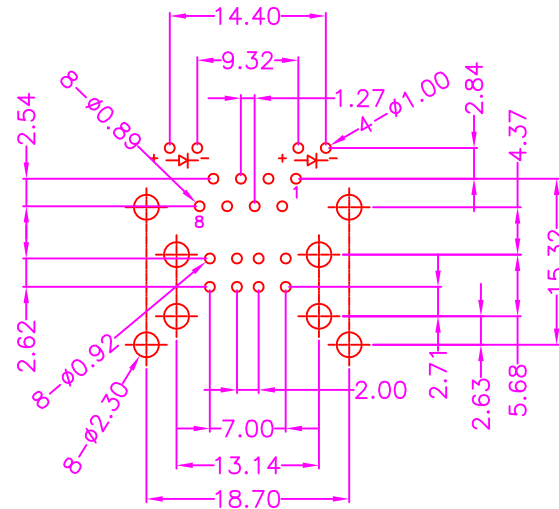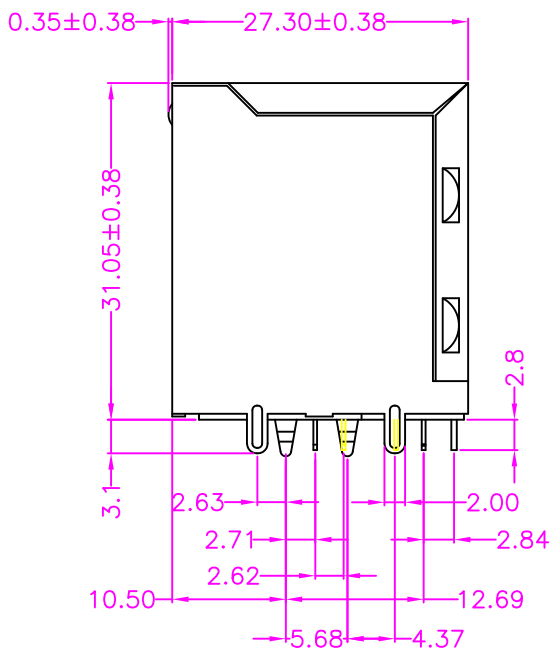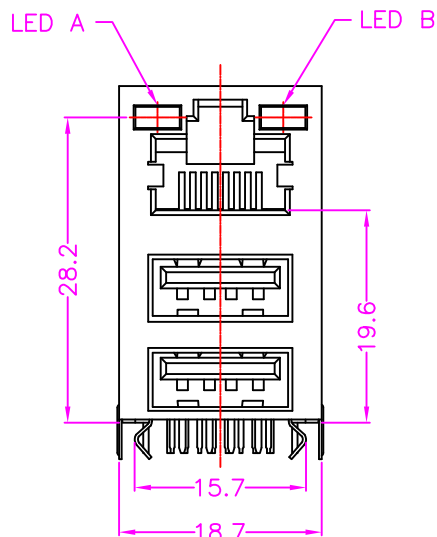

P.C.B. LAYOUT
TOP VIEW ±0.05


PART NUMBER:
71MJUS - 2 0 * T - 9 1 2 *

SERIES NO. OF POS. LED OPTION REF. TABLE 1 TRAY PACKAGE

CONTACT PLATED OPTION
1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
9: 30u" GOLD

TIN PLATING ON SOLDER TAIL

A	RELEASE	2011.3.11
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel: +886-3-4951314						
TOLERANCES		COMBO CONNECTOR SERIES				
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°		TITLE	RJ45 + USB FEMALE, PCB MOUNT, R/A, METAL SHIELD WITH LED			
		DRAWN BY	CHECKED BY		APPROVED BY	
		Janice	Lion		Benson	
		UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
		10058	MM	NONE	A4	71MJUS-010 A 1/1