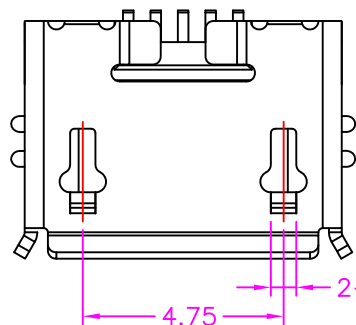




MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
SHELL: STAINLESS STEEL, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION

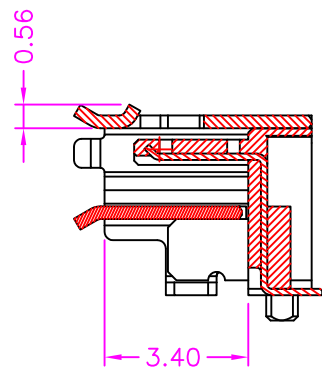
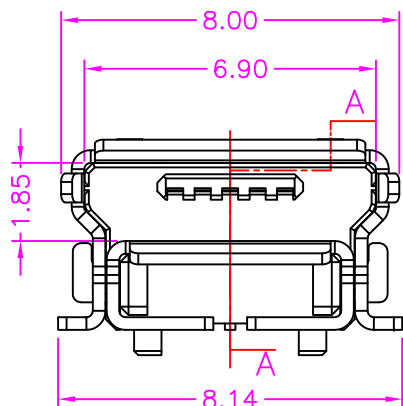
CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

PART NUMBER:
2USTB - 0 5 * - 1 * 3

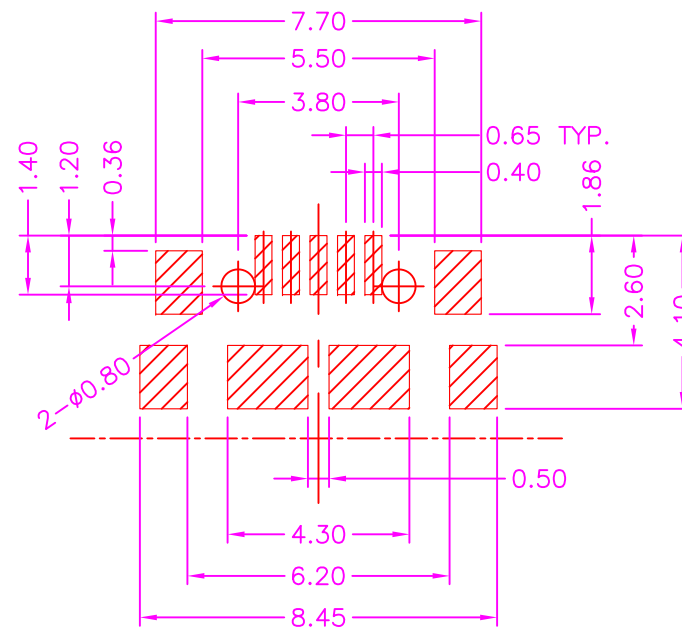
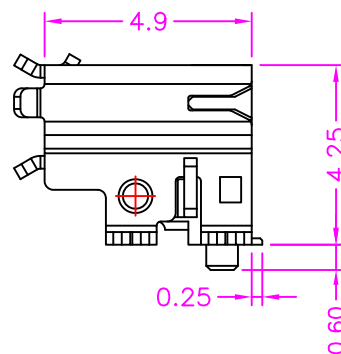
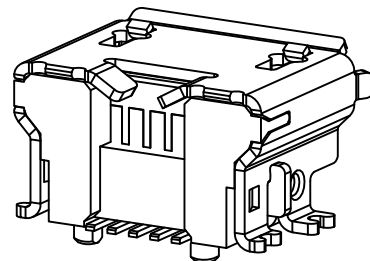
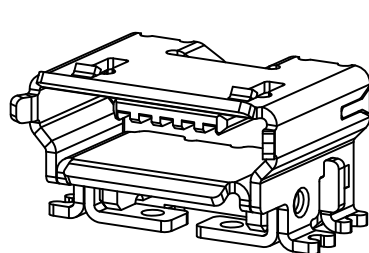
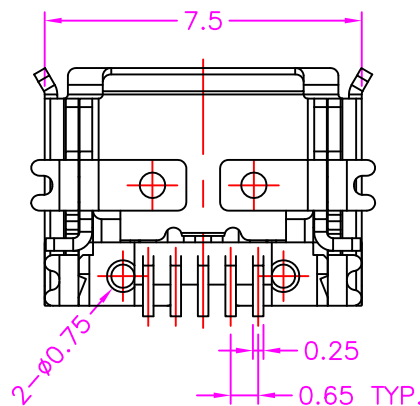
SERIES
NO. OF POS.
CONTACT PLATED OPTION

PACKAGE OPTION
2: TAPE REEL
3: TUBE

1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
7: 15u" GOLD
9: 30u" GOLD




SECTION A-A

P.C.B. LAYOUT
TOP VIEW ±0.05**Cyberconn Technology Co., Ltd.**

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		USB CONNECTOR SERIES						
X.X ±0.3		TITLE		MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD FEMALE, STAND OFF HEIGHT=4.25mm				
X.XX ±0.2								
X.XXX±0.1								
Angle ±5°								
		DRAWN BY		CHECKED BY		APPROVED BY		
		<i>Janice</i>		<i>Lion</i>		<i>Benson</i>		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
		10001	MM	NONE	A4	2USTB-003	A	1/1

A	RELEASE	2012.8.1
REV.	DESCRIPTION	DATE