

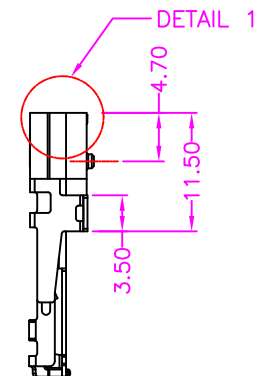


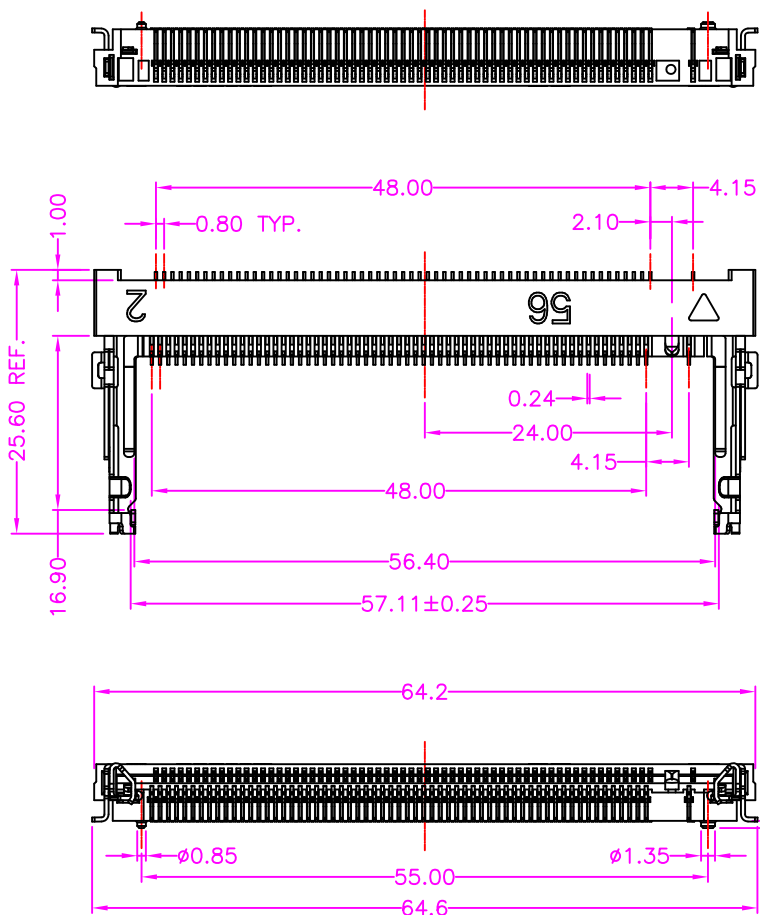

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
LATCH: SUS, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -55°C~+85°C

PART NUMBER:

4MSLF - 1 2 4 * T - 1 * 2

SERIES

NO. OF POS.

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 2: 2u" GOLD
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

PACKAGE OPTION

- 1: TRAY
- 2: TAPE REEL

TIN PLATING ON SOLDER TAIL





Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel +886-3-4951314


TOLERANCES		MEMORY SOCKET SERIES						
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE	MINI PCI SOCKET 124 PIN, 0.80mm PITCH, PCB MOUNT, SMT, FEMALE, WITH LATCH & POST (H=5.60mm)					
			DRAWN BY		CHECKED BY		APPROVED BY	
			Janice		Lion		Benson	
			UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
10022		MM	NONE	A4	4MSLF-002	A	1/2	

A	RELEASE	2012.5.28
REV.	DESCRIPTION	DATE

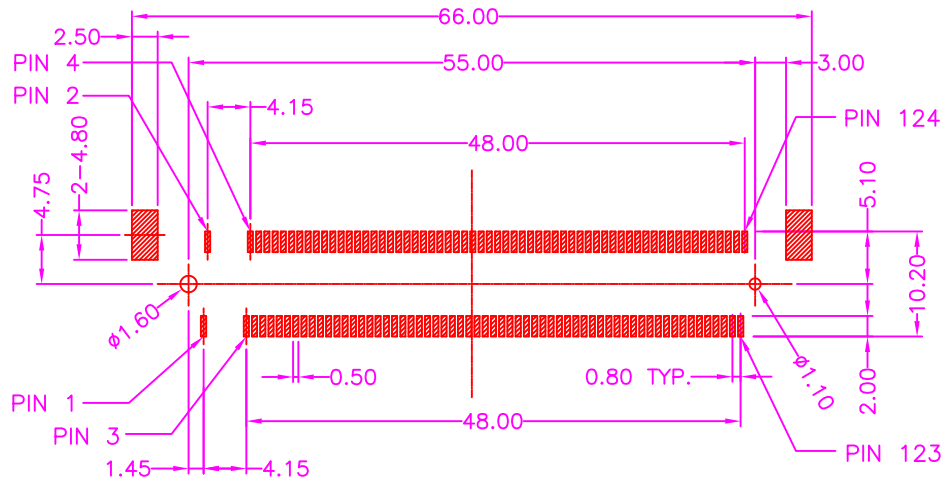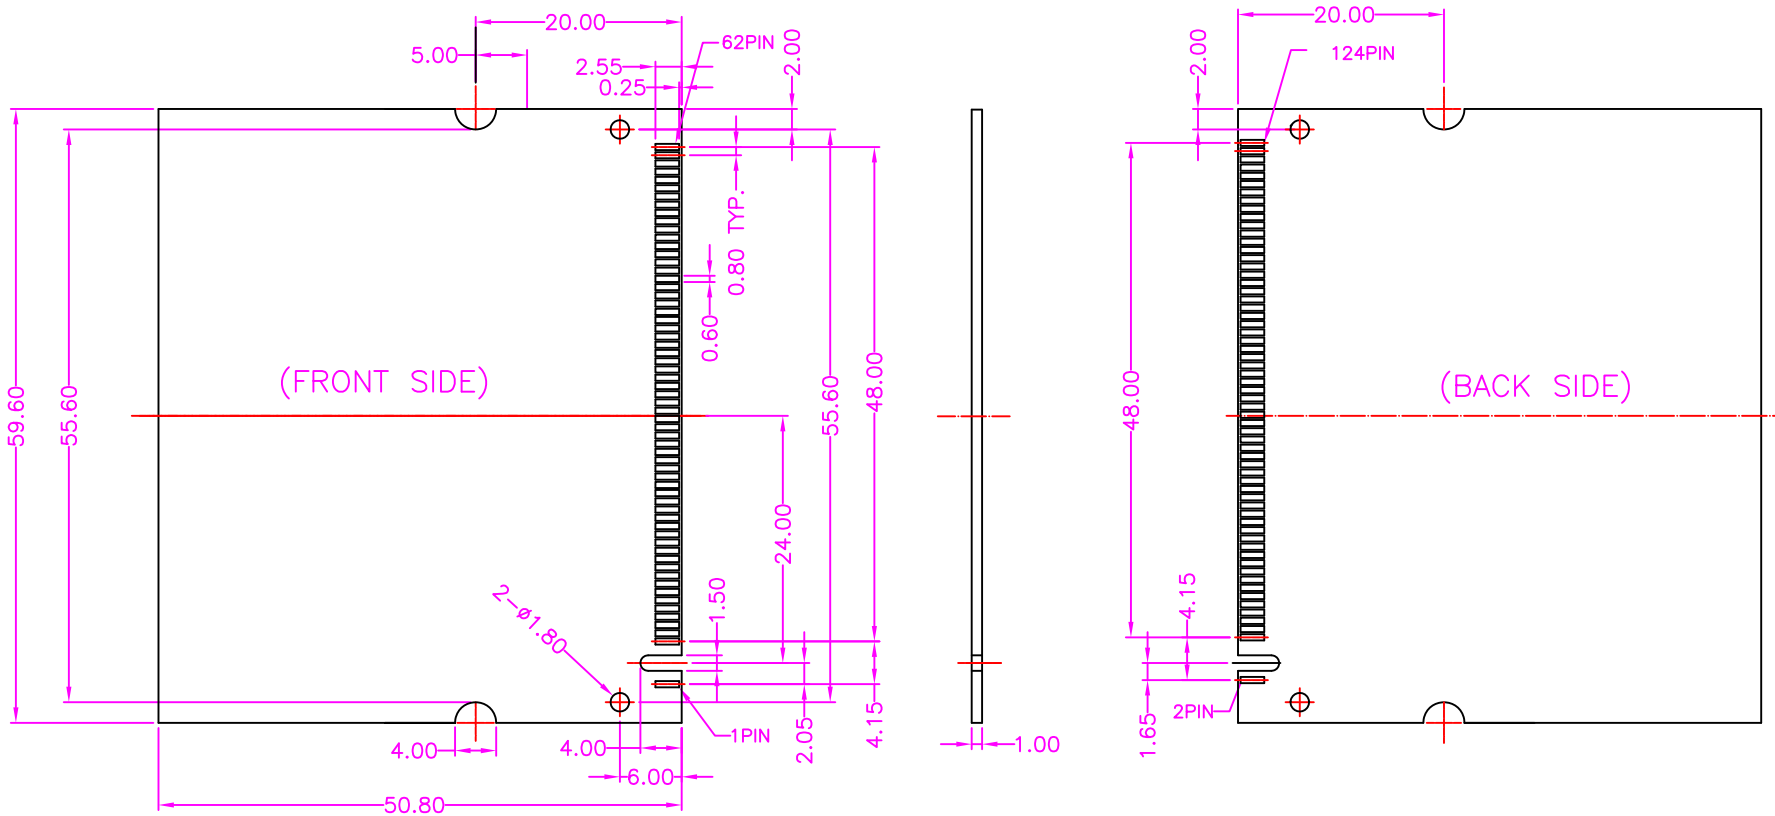

P.C.B LAYOUT
TOP VIEW ±0.05

A	RELEASE	2012.5.28
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314							
TOLERANCES		MEMORY SOCKET SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE MINI PCI SOCKET 124 PIN, 0.80mm PITCH, PCB MOUNT, SMT, FEMALE, WITH LATCH & POST (H=5.60mm)					
		DRAWN BY		CHECKED BY		APPROVED BY	
		Janice		Lion		Benson	
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
10022		MM	NONE	A4	4MSLF-002	A	2/2