

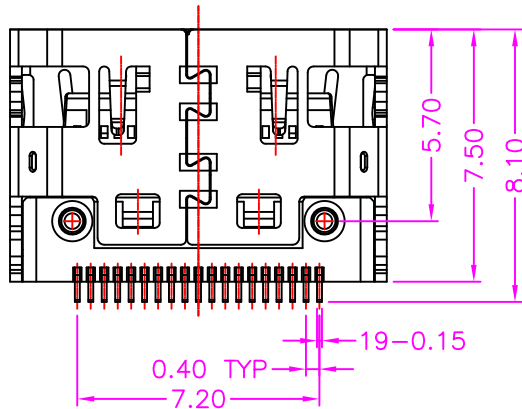
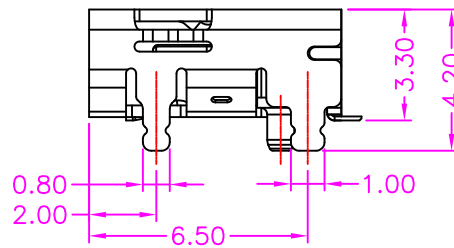
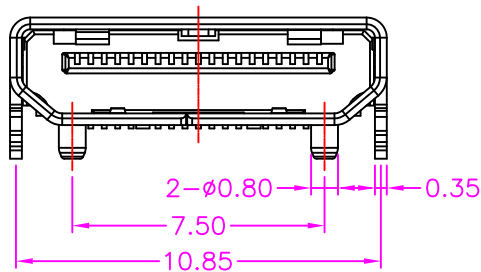
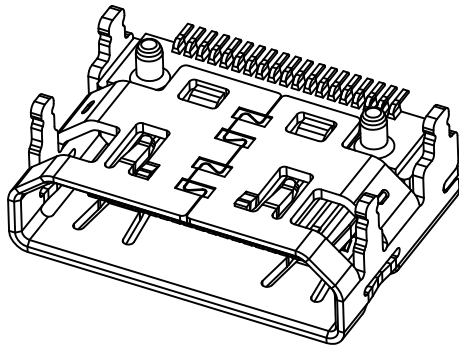


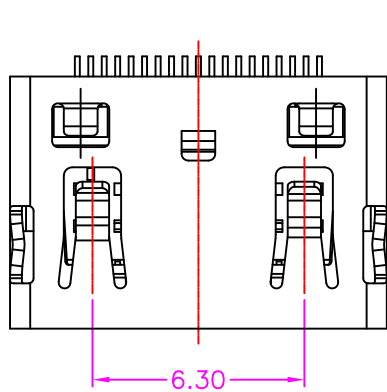

PART NUMBER:
2HDHE - 1 9 * T * - 1 2 2

SERIES NO. OF POS. SHELL PLATING OPTION
TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION
1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
7: 15u" GOLD
9: 30u" GOLD

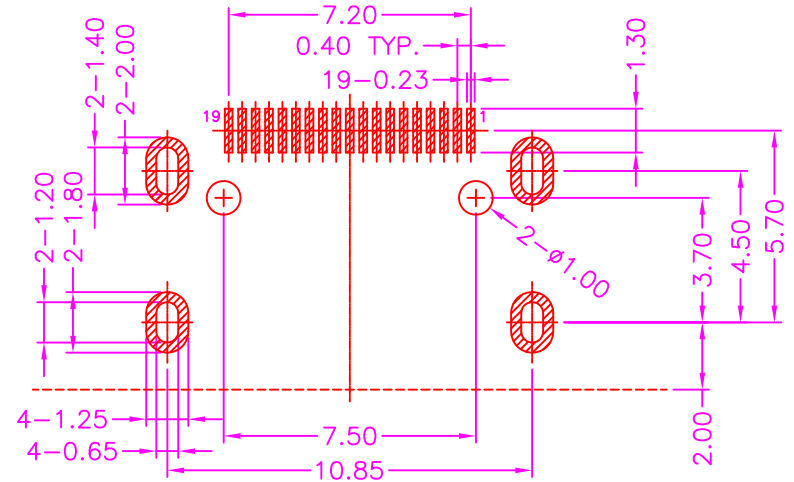

P.C.B LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: COPPER ALLOY
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+70°C



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		HDMI CONNECTOR SERIES						
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE		MINI HDMI C TYPE, 0.40mm PITCH, PCB MOUNT, SMT METAL SHIELD, FEMALE, 19PIN, WITH POST				
		DRAWN BY		CHECKED BY		APPROVED BY		
		Janice		Lion		Benson		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10096		MM	NONE	A4	2HDHE-002	A	1/1	

A	RELEASE	2012.9.11
REV.	DESCRIPTION	DATE