





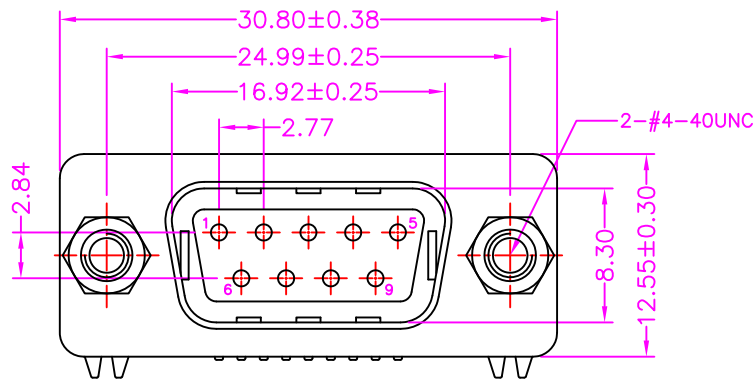


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: SPCC, NICKEL PLATING
 BOARD LOCK: SPCC, TIN PLATING
 SCREW: SPCC, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 5 AMP MAX
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C

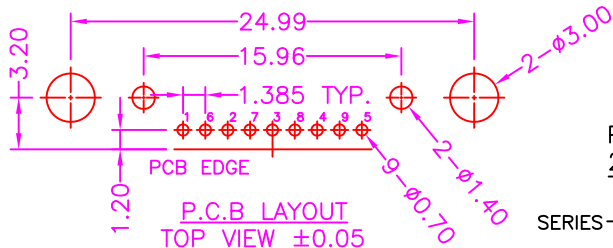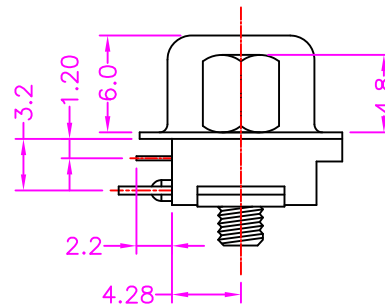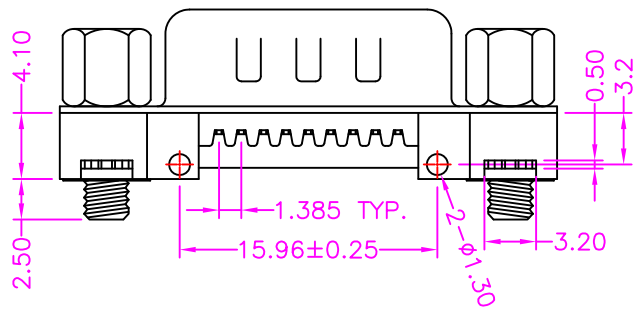

PART NUMBER:

2DBKC - 0 9 * T * - 2 1 0

SERIES

NO. OF POS.

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

TRAY PACKAGE

SCREW OPTION

- 1: RIVETED & WITH SCREW
- 2: RIVETED & WITHOUT SCREW

TIN PLATING ON SOLDER TAIL



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		D-SUB CONNECTOR SERIES							
X.X ±0.3		TITLE	SLIM D-SUB, PCB MOUNT, R/A, METAL SHIELD, MALE, STAMPED PIN, WITH BOARDLOCK						
X.XX ±0.2									
X.XXX ±0.1			DRAWN BY		CHECKED BY		APPROVED BY		
Angle ±5°									
		<i>Janice</i>		<i>Lion</i>		<i>Benson</i>			
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet		
10037		MM	NONE	A4	2DBKC-001	A	1/1		

A	RELEASE	2012.7.27
REV.	DESCRIPTION	DATE