


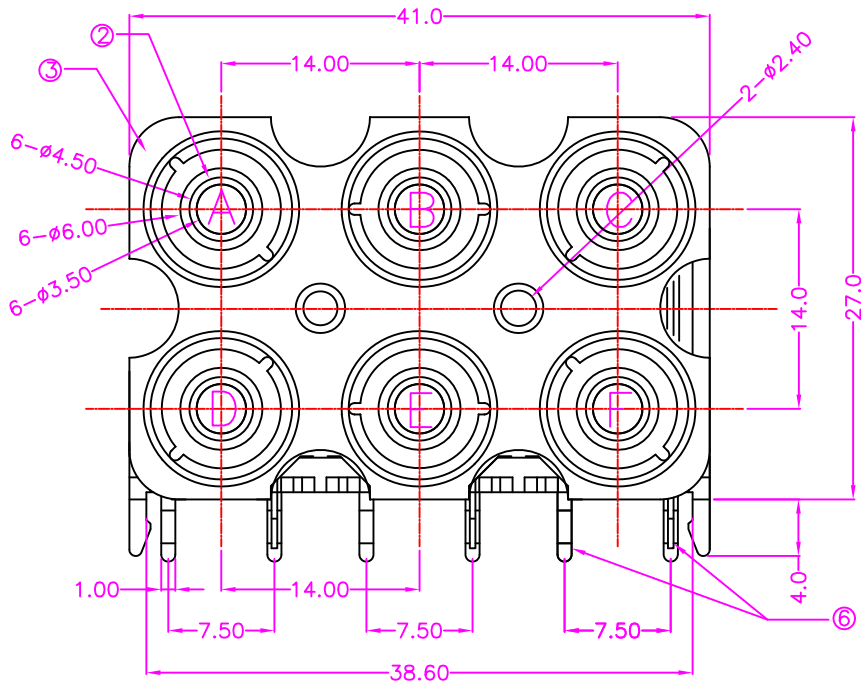

P.C.B LAYOUT
TOP VIEW ±0.05


PART NUMBER:

3RCCF - 0 9 T - 1 1 1 *

SERIES

NO. OF POS.

TIN PLATING ON TERMINAL

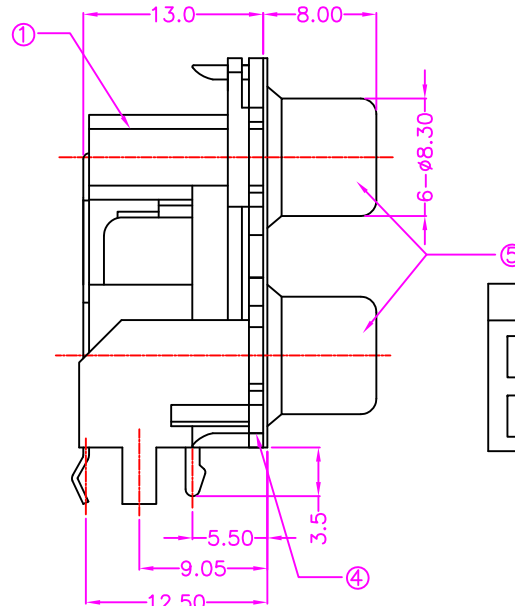

MATERIALS

1. HOUSING: PBT (UL 94V-0)
2. RING: PBT (UL 94V-0)
3. SHELL: COPPER ALLOY, TIN PLATING
4. PLATE: A.B.S.
5. BARREL: COPPER ALLOY, TIN PLATING
6. TERMINAL: COPPER ALLOY, TIN PLATING


SPECIFICATION

CURRENT RATING: 2 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

TABLE 1

RING COLOR OPTION		
CODE	A	B
A	WHITE	WHITE
B	WHITE	RED
C	YELLOW	YELLOW
D	RED	WHITE
E	RED	RED
F	YELLOW	YELLOW

SCHEMATIC

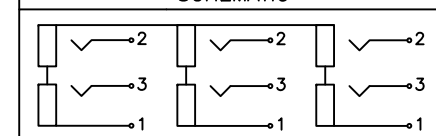

Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES	RCA JACK CONNECTOR SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°	TITLE	2x3 STACKED RCA JACK, PCB MOUNT, R/A WITH METAL SHIELD				
	DRAWN BY	CHECKED BY		APPROVED BY		
	Janice	Lion		Benson		
10024	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	MM	NONE	A4	3RCCF-001	A	1/1