


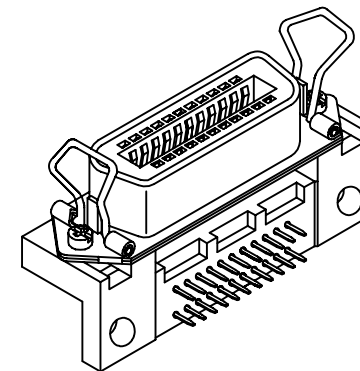

MATERIALS

HOUSING: PBT (UL 94V-0)
SHELL: STEEL, NICKEL PLATING
LATCH: COPPER ALLOY
TERMINAL: COPPER, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
CONTACT RESISTANCE: 40m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -55°C~+105°C

PART NUMBER:

2SCPD - 1 * * - 1 1 0

SERIES

PCB LAYOUT STYLE 1

NO. OF POS. OPTION
REF. TABLE 1

TRAY PACKAGE

CONTACT PLATED OPTION
1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD

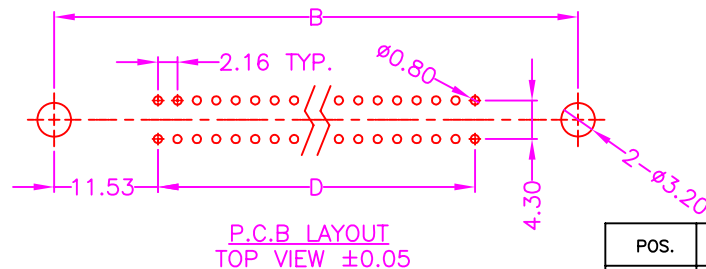

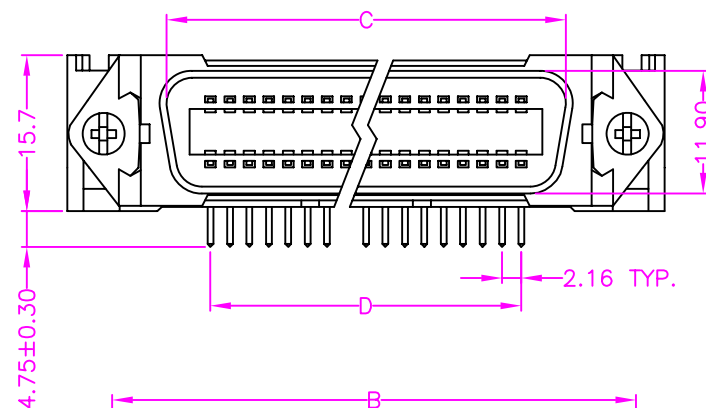
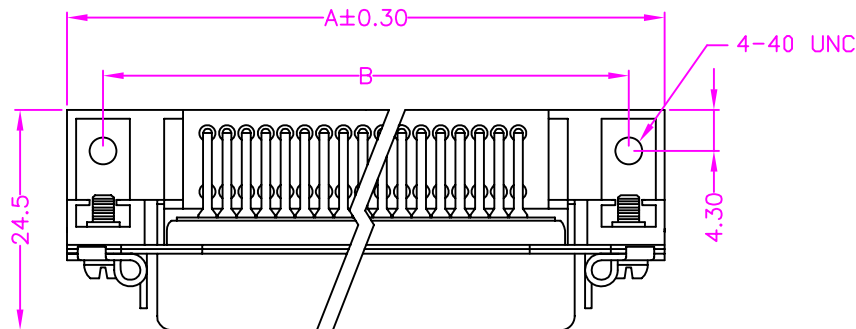
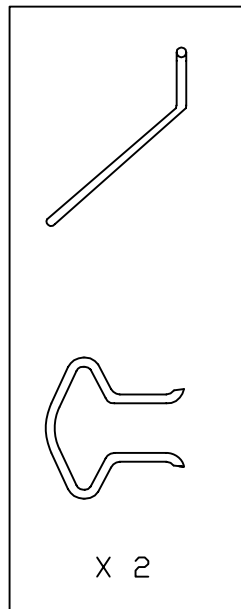


TABLE 1

POS.	A	B	C	D
14	43.9	36.0	25.2	12.96
24	54.7	46.8	36.0	23.76
36	67.7	59.7	48.9	36.72
50	82.8	74.9	64.1	51.84

 Cyberconn Technology Co., Ltd. Tel+886-3-4951314					
TOLERANCES		SCSI CONNECTOR SERIES			
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°		TITLE CENTRONIC SCSI, STYLE 1, 2.16mm PITCH, PCB MOUNT, R/A, METAL SHIELD, FEMALE, WITH LATCH			
DRAWN BY		CHECKED BY		APPROVED BY	
Janice		Lion		Benson	
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
MM	NONE	A4	2SCPD-001	A	1/1

A	RELEASE	2011.7.4
REV.	DESCRIPTION	DATE