



1 2 3 4 5 6 7 8

F

F

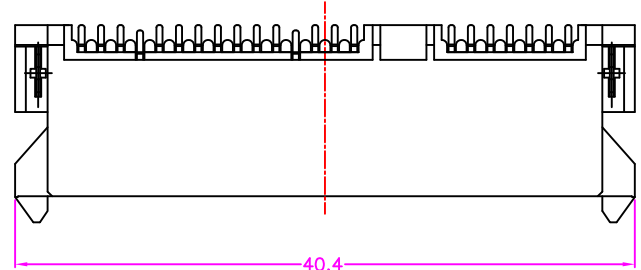

SECTION A-A

MATERIALS




HOUSING: LCP (UL 94V-0), BLACK  
 BOARDLOCK: COPPER ALLOY, TIN PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+105°C

E

E

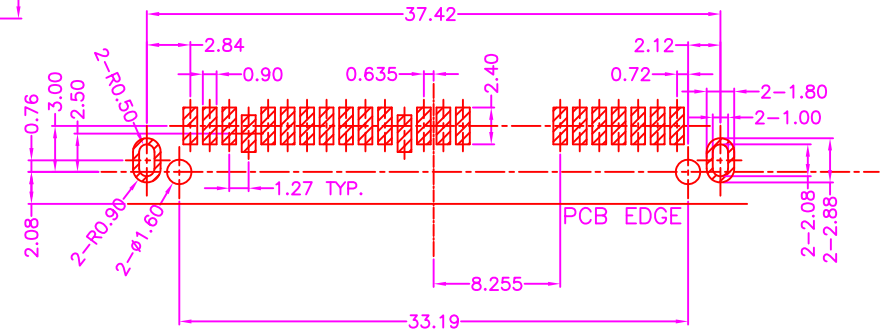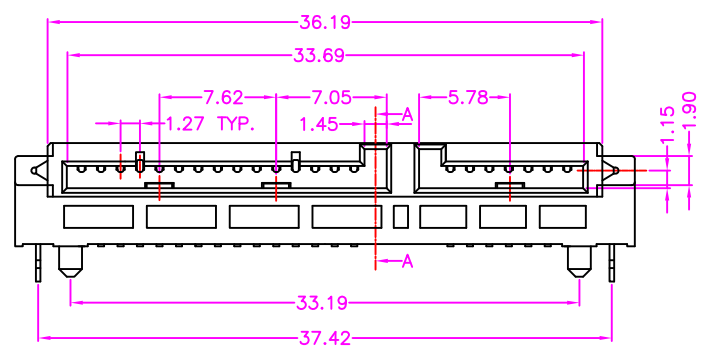


P.C.B LAYOUT TOP VIEW ±0.05

D

D

C

C

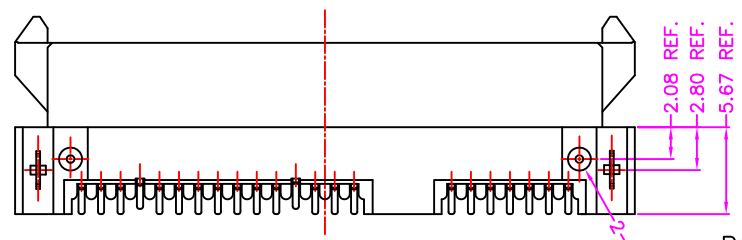

PART NUMBER:  
**2SAJG - 2 2 \* T - 1 \* 1**

SERIES: 2SAJG  
 NO. OF POS.: 2 2  
 CONTACT PLATED OPTION: \*  
 TIN PLATING ON SOLDER TAIL: T  
 PACKAGE OPTION: - 1 \* 1

1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 6: 10u" GOLD  
 7: 15u" GOLD  
 9: 30u" GOLD

**Cyberconn Technology Co., Ltd.**  
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	SATA CONNECTOR SERIES				
X.X ±0.3	TITLE: SATA 7+15 PIN, PCB MOUNT, R/A SMT REVERSE TYPE FEMALE WITH POST & BOARDLOCK, H=6.74mm				
X.XX ±0.2	DRAWN BY: <i>Janice</i>		CHECKED BY: <i>Lion</i>		APPROVED BY: <i>Benson</i>
X.XXX ±0.1	UNIT: MM	SCALE: NONE	SIZE: A4	DRAW NO.: 2SAJG-001	REV. A
Angle ±5°				Sheet	1/1

A

A

A	RELEASE	2013.1.30
REV.	DESCRIPTION	DATE

1 2 3 4 5 6 7 8