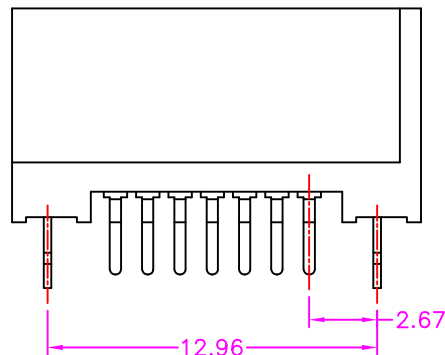
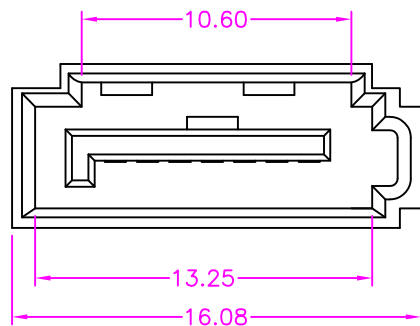
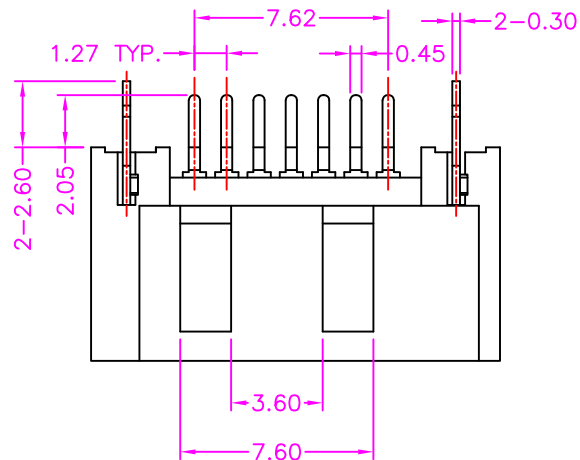


MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
BOARD LOCK: COPPER ALLOY, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -55°C~+105°C

PART NUMBER:

2SAEE - 0 7 * T - 2 3 0

SERIES

NO. OF POS.

CONTACT PLATED OPTION

1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD

TUBE PACKAGE

TIN PLATING ON SOLDER TAIL



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES	SATA CONNECTOR SERIES					
X.X ±0.3	TITLE SATA 7PIN, PCB MOUNT, VERTICAL, ALL PLASTIC FULL COVER, WITH BOARDLOCK, MALE					
X.XX ±0.2						
X.XXX ±0.1	DRAWN BY		CHECKED BY		APPROVED BY	
Angle ±5°	Janice		Lion		Benson	
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10072	MM	NONE	A4	2SAEE-001	A 1/1

A	RELEASE	2012.2.24
REV.	DESCRIPTION	DATE