

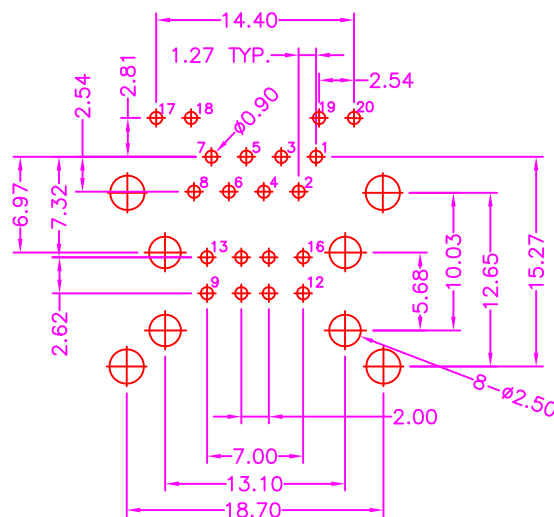
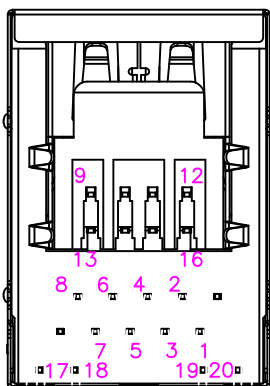
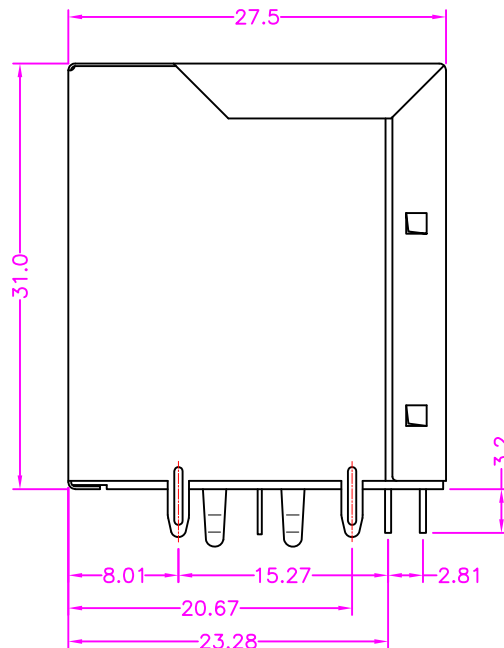


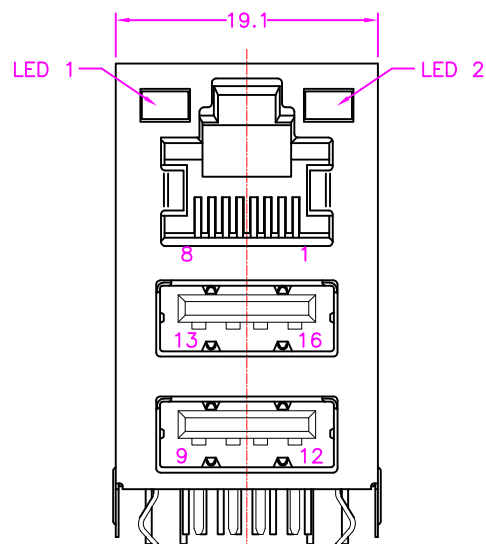

P.C.B. LAYOUT
TOP VIEW ± 0.05



A	RELEASE	2013.9.16
REV.	DESCRIPTION	DATE

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATED ON SOLDER TAIL

SPECIFICATION

USB
CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-0^{\circ}\text{C}\sim+70^{\circ}\text{C}$

RJ45
CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-0^{\circ}\text{C}\sim+70^{\circ}\text{C}$

PART NUMBER:

71MJUS - 2 2 * T - 9 1 3 *

SERIES

NO. OF POS.

CONTACT PLATED OPTION

1: GOLD FLASH

3: 3u" GOLD

5: 5u" GOLD

7: 15u" GOLD

9: 30u" GOLD

11: 6u" GOLD

LED OPTION
REF. TABLE 1

TRAY PACKAGE

TIN PLATING ON SOLDER TAIL

TABLE 1

P/N	LED COLOR OPTION	
	LED 1	LED 2
1	Yellow	Green
2	Green	Yellow
3	Yellow/Green	Yellow/Green
4	Green/Orange	Green/Orange

LED SCHEMATIC	
SINGLE LED	DUAL LED
LED 1 17 → 18	LED 1 17 → 18
LED 2 19 → 20	LED 2 19 → 20



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel: +886-3-4951314

TOLERANCES		COMBO CONNECTOR SERIES				
X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1 Angle $\pm 5^{\circ}$		TITLE	STACKED RJ45 + USB, PCB MOUNT, SIDE ENTRY METAL SHIELD, WITH LED			
		DRAWN BY	CHECKED BY		APPROVED BY	
		Janice	Lion		Benson	
		UNIT	SCALE	SIZE	DRAW NO.	REV.
		10003	MM	NONE	A4	71MJUS-013 A
						Sheet 1/1