

SCALE 2:1

**MATERIALS**

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)  
 TERMINAL: COPPER ALLOY, GOLD PLATED

**SPECIFICATION**

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 55m OHMS MAX  
 INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+80°C

PART NUMBER:  
 4CEGT - 7 5 \* - 1 2 3

SERIES — NO. OF POS. — TAPE REEL

CONTACT PLATED OPTION


- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 9: 30u" GOLD

A	RELEASE	2014.3.24
REV.	DESCRIPTION	DATE

**Cyberconn Technology Co., Ltd.**  
 www.cyberconn.com.tw Tel: +886-3-4951314

TOLERANCES	CARD EDGE SERIES				
X.X ±0.3	TITLE NGFF(M.2), 0.5mm PITCH, PCB MOUNT, SMT, FEMALE				
X.XX ±0.2	E KEY WITH PAD, H=3.00mm				
X.XXX ±0.1	DRAWN BY	CHECKED BY	APPROVED BY		
Angle ±5°	<i>Tina</i>	<i>Lion</i>	<i>Benson</i>		
	UNIT	SCALE	SIZE	DRAW NO.	REV.
	10001	MM	NONE	A4	4CEGT-003
					Sheet
					A
					1/4




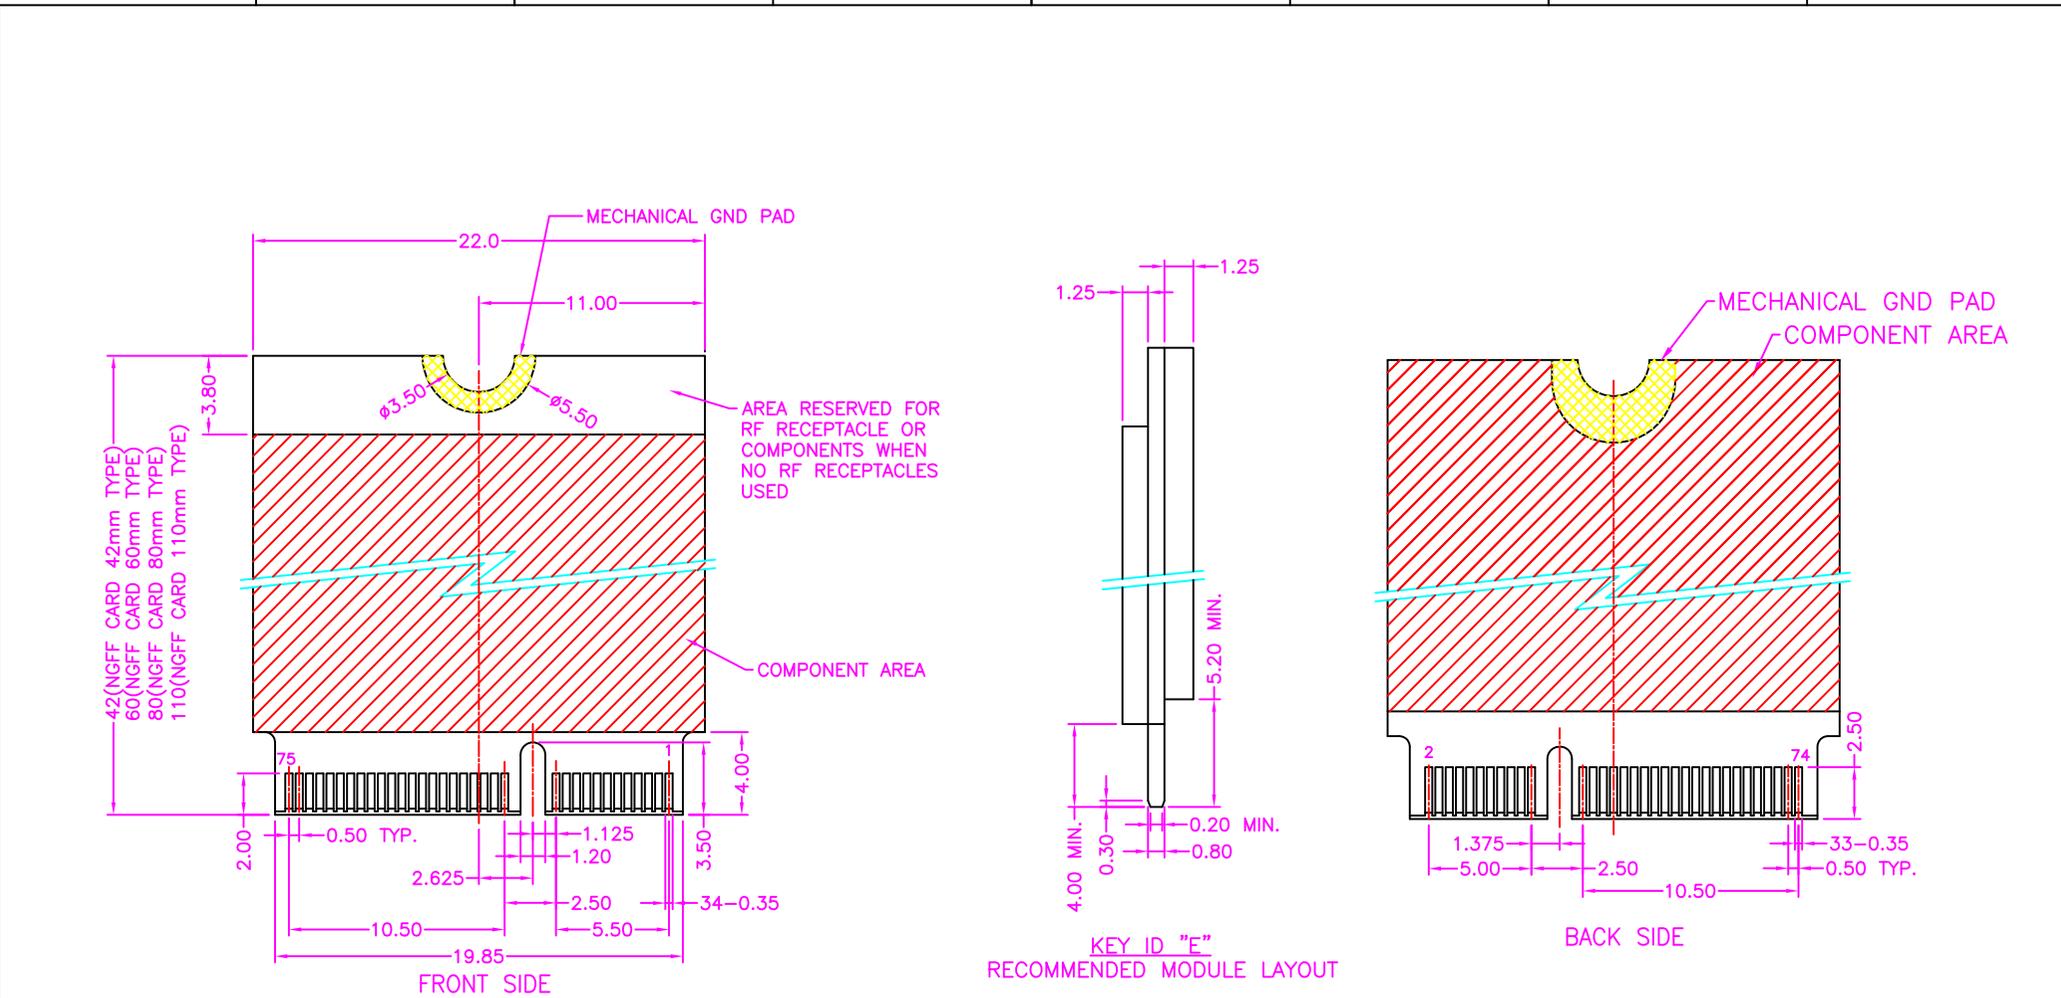


A	RELEASE	2014.3.24
REV.	DESCRIPTION	DATE


**Cyberconn Technology Co., Ltd.**  
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	CARD EDGE SERIES					
X.X ±0.3	TITLE NGFF(M.2), 0.5mm PITCH, PCB MOUNT, SMT, FEMALE					
X.XX ±0.2	E KEY WITH PAD, H=3.00mm					
X.XXX ±0.1	DRAWN BY	CHECKED BY		APPROVED BY		
Angle ±5°	<i>Tina</i>	<i>Lion</i>		<i>Benson</i>		
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10001	MM	NONE	A4	4CEGT-003	A 3/4


DIRECTION OFF TOP OF REEL

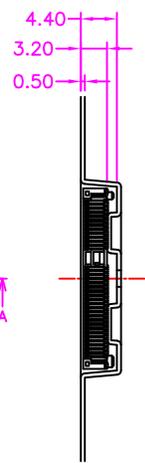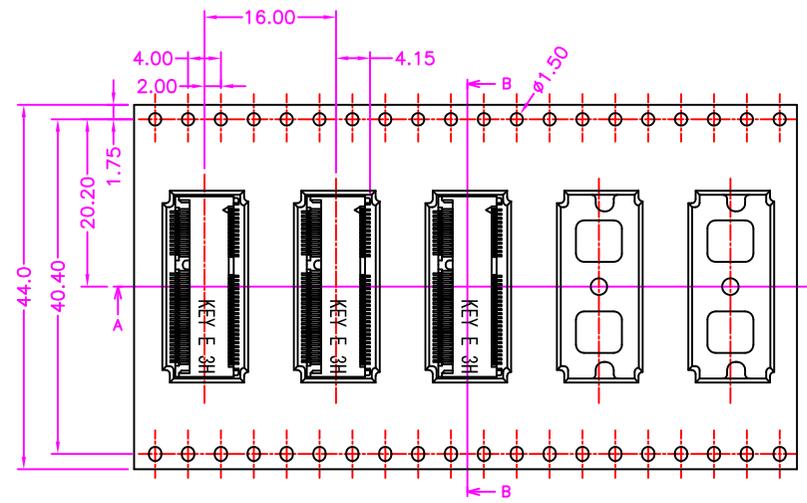

SECTION B-B



SECTION A-A

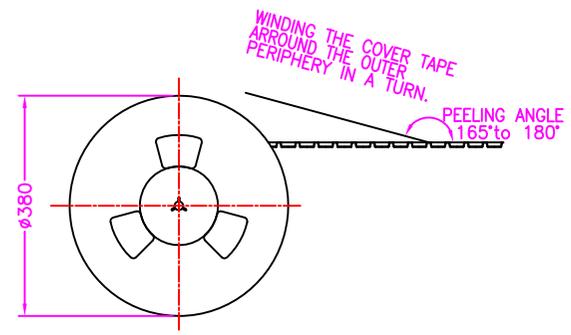

NOTES:  
 PACKED IN EMBOSS TAPE AND PLASTIC REEL 1200 PCS PER REEL  
 1200PCS/REEL  
 7200PCS/CARTON

<b>Cyberconn Technology Co., Ltd.</b> www.cyberconn.com.tw Tel:+886-3-4951314						
TOLERANCES		CARD EDGE SERIES				
X.X ±0.3		TITLE NGFF(M.2), 0.5mm PITCH, PCB MOUNT, SMT, FEMALE E KEY WITH PAD, H=3.00mm				
X.XX ±0.2						
X.XXX ±0.1						
Angle ±5°		DRAWN BY	CHECKED BY	APPROVED BY		
		<i>Tina</i>	<i>Lion</i>	<i>Benson</i>		
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10001	MM	NONE	A4	4CEGT-003	A	4/4

A	RELEASE	2014.3.24
REV.	DESCRIPTION	DATE