

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -0°C~+70°C

PART NUMBER:

3MJDT - 2 6 8 8 * - 1 1 7

SERIES

2X6 PORT

8 POSITION & 8 CONTACT-

— TRAY PACKAGE

— TERMINAL PLATED OPTION

1: GOLD FLASH







3: 3u" GOLD

5: 5u" GOLD

7: 15u" GOLD

9: 30u" GOLD

11: 6u" GOLD

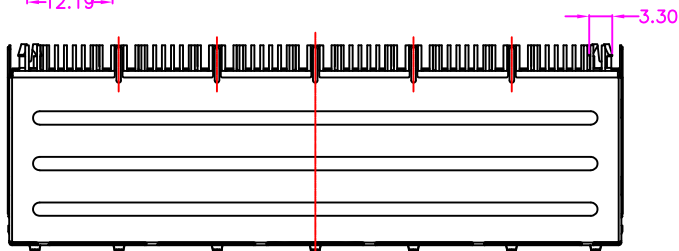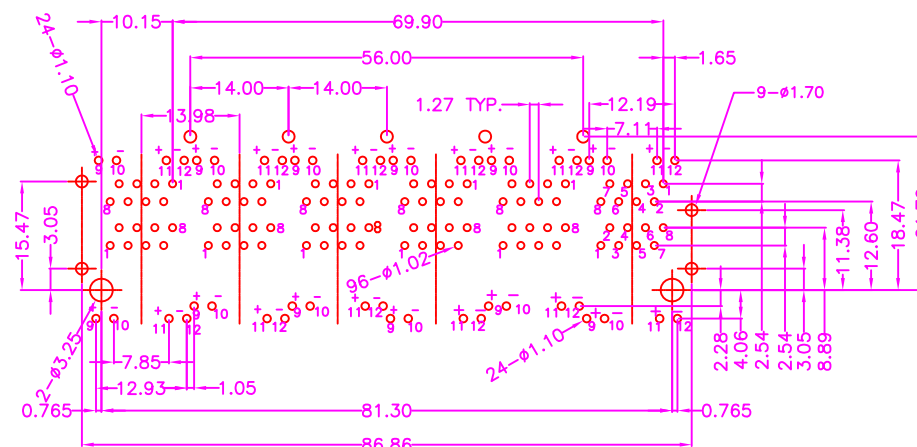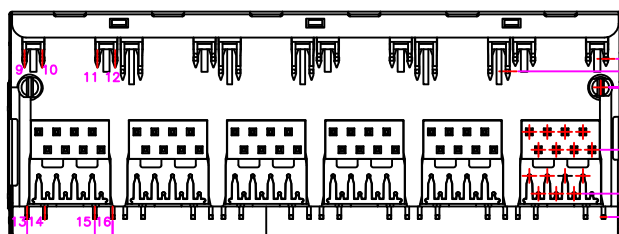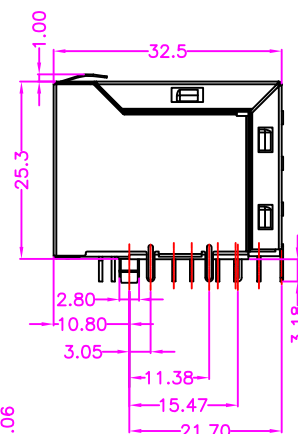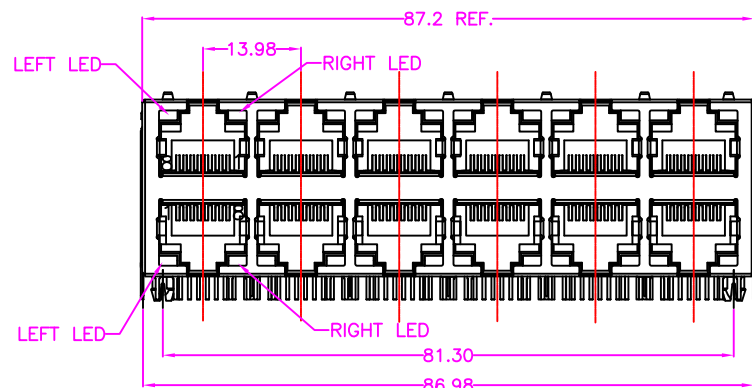

LED PIN DEFINE

P.C.B LAYOUT
TOP VIEW ±0.05



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel: +886-3-4951314

TOLERANCES		MODULAR JACK SERIES							
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE		2x6 STACKED RJ45, PCB MOUNT, SIDE ENTRY METAL SHIELD, WITH SPRING & LED					
		DRAWN BY		CHECKED BY		APPROVED BY			
		Tina		Lion		Benson			
UNIT		SCALE		SIZE	DRAW NO.		REV.	Sheet	
10003		MM		NONE	A4	3MJDT-007		A	1/1