


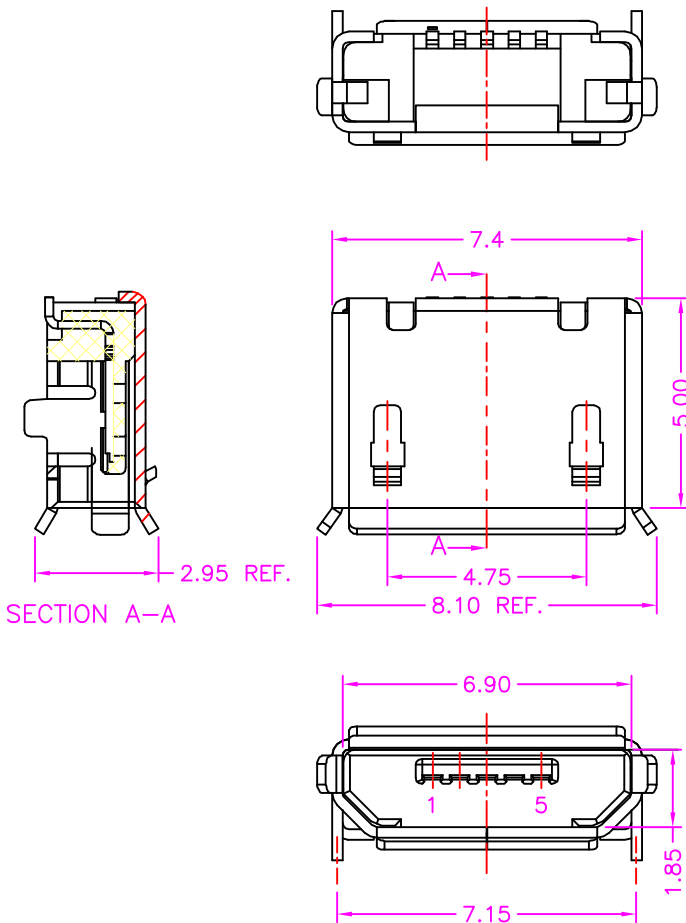


PART NUMBER:
2USTA - 0 5 * - 1 * 9

SERIES
NO. OF POS.

CONTACT PLATED OPTION
1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
7: 15u" GOLD
9: 30u" GOLD

PACKAGE OPTION
2: TAPE REEL
3: TUBE

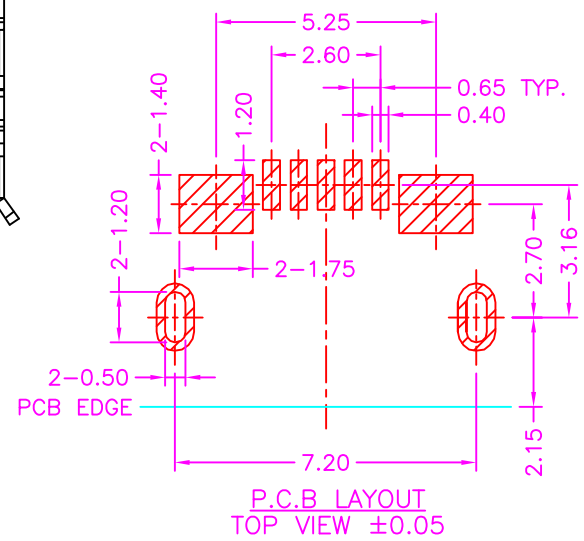


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -30°C~+80°C

A	RELEASE	2014.9.25
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314						
TOLERANCES	USB CONNECTOR SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	TITLE	MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD FEMALE				
	DRAWN BY	CHECKED BY		APPROVED BY		
	Tina	Lion		Benson		
10147	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	MM	NONE	A4	2USTA-009	A	1/1