
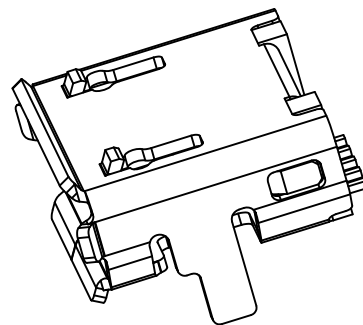



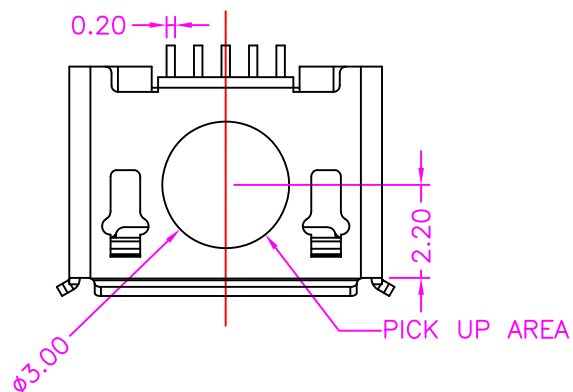


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION



CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

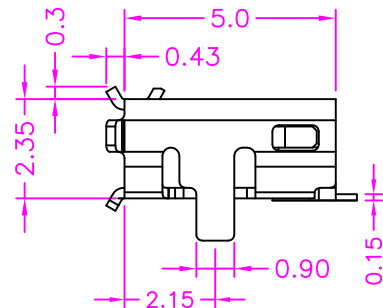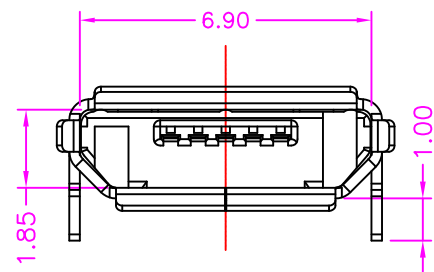

PART NUMBER:
2USTA - 0 5 * - 1 * 8
SERIES — NO. OF POS. — PACKAGE OPTION
2: TAPE REEL
3: TUBE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

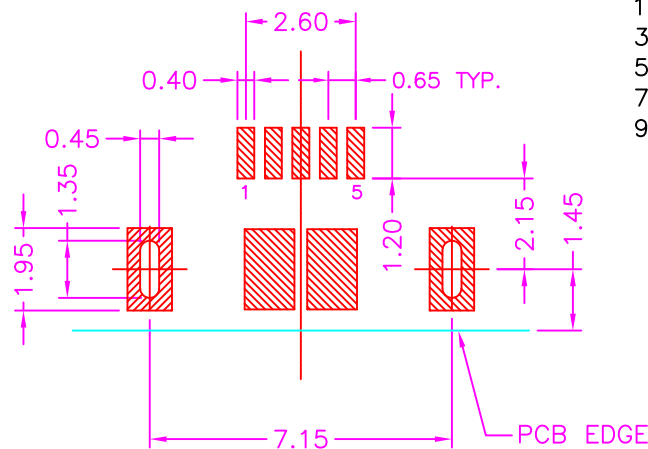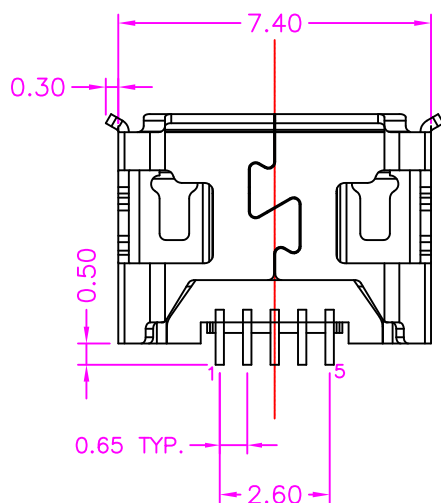

P.C.B. LAYOUT
TOP VIEW ±0.05



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		TITLE	USB CONNECTOR SERIES					
X.X ±0.3			MICRO USB B TYPE, PCB MOUNT, SMT					
X.XX ±0.2			METAL SHIELD, FEMALE					
X.XXX ±0.1			DRAWN BY		CHECKED BY		APPROVED BY	
Angle ±5°		Tina		Lion		Benson		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10136		MM	NONE	A4	2USTA-008	A	1/1	