
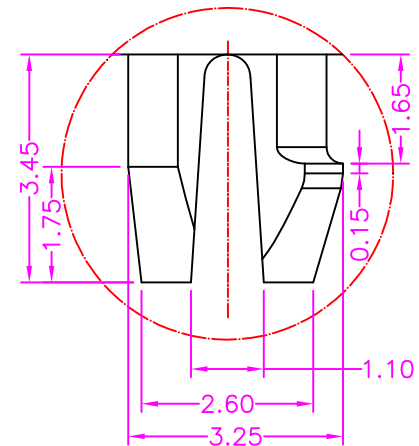
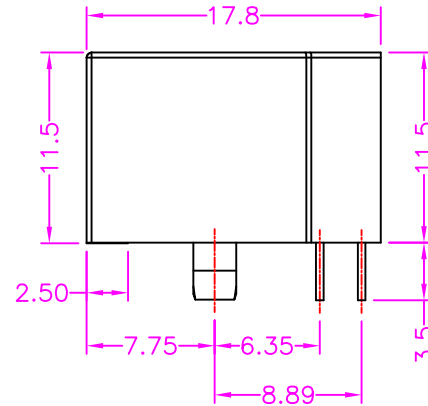


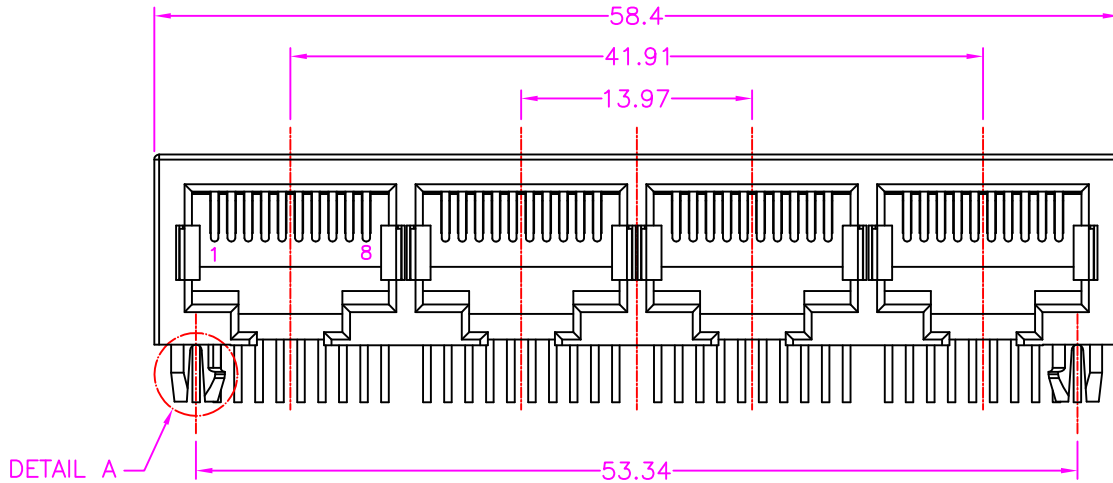


DETAIL A
SCALE 4

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

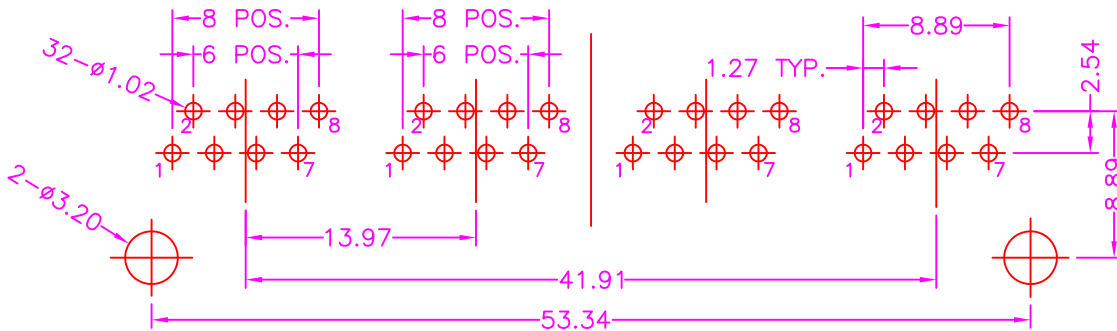

P.C.B. LAYOUT
TOP VIEW ±0.05

PART NUMBER:

3MJDA - 1 4 8 8 * - 1 1 0 *

SERIES

1X4 PORT

8 POSITION & 8 CONTACT

HOUSING COLOR OPTION
BLANK: BLACK
Y: YELLOW

TRAY PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30 u" GOLD

A	RELEASE	2011.7.19
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314						
TOLERANCES	MODULAR JACK SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	TITLE	1X4 GANG RJ45, PCB MOUNT, SIDE ENTRY, ALL PLASTIC				
	DRAWN BY	CHECKED BY		APPROVED BY		
	Janice	Lion		Benson		
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10006	MM	NONE	A4	3MJDA-001	A 1/1