

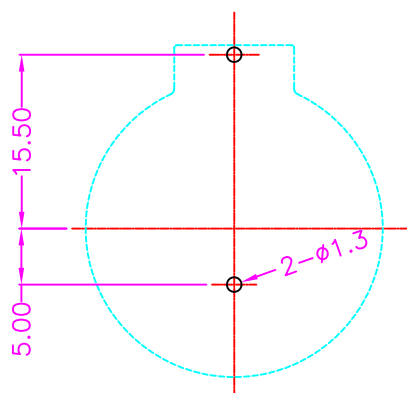
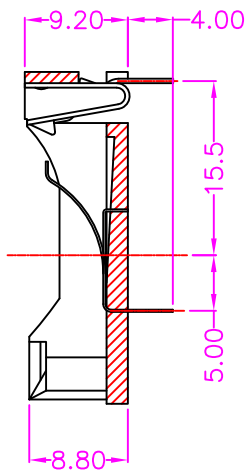


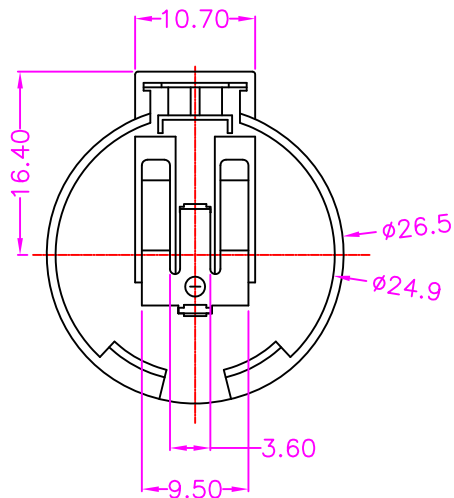

P.C.B. LAYOUT
TOP VIEW ±0.05

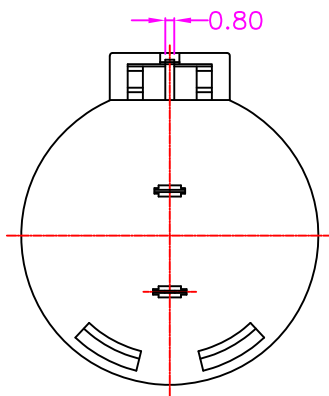

MATERIALS

HOUSING: PBT (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, NICKEL PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+80°C

PART NUMBER:

1BTHA - N - 0 2 1

SERIES

TAPE REEL PACKAGE

NICKEL PLATING ON TERMINAL



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		TITLE	BATTERY CONNECTOR SERIES					
X.X ±0.3			BATTERY HOLDER, VERTICAL, ALL PLASTIC					
X.XX ±0.2			DRAWN BY		CHECKED BY		APPROVED BY	
X.XXX±0.1								
Angle ±5°		Tina		Lion		Benson		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10121		MM	NONE	A4	1BTHA-001	A	1/1	

A	RELEASE	2014.12.29
REV.	DESCRIPTION	DATE