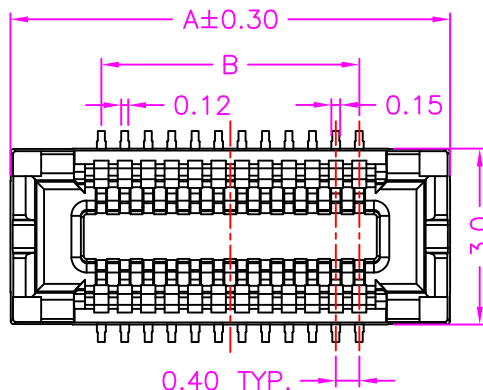


MATERIALS


HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.3 AMP MAX
DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
CONTACT RESISTANCE: 80m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 250V
OPERATION TEMPERATURE: -40°C~+85°C

TABLE

POS.	DIMENSION	
	A	B
10	4.70	1.60
12	5.10	2.00
14	5.50	2.40
16	5.90	2.80
20	6.70	3.60
22	7.10	4.00
24	7.50	4.40
26	7.90	4.80
30	8.70	5.60
34	9.50	6.40
40	10.70	7.60
44	11.50	8.40
50	12.70	9.60
60	14.70	11.60
70	16.70	13.60




PART NUMBER:
1BBEC - * * * - 1 2 1


SERIES NO. OF POS. REF. TABLE CONTACT PLATED OPTION

1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
7: 15u" GOLD
9: 30u" GOLD

TAPE REEL PACKAGE

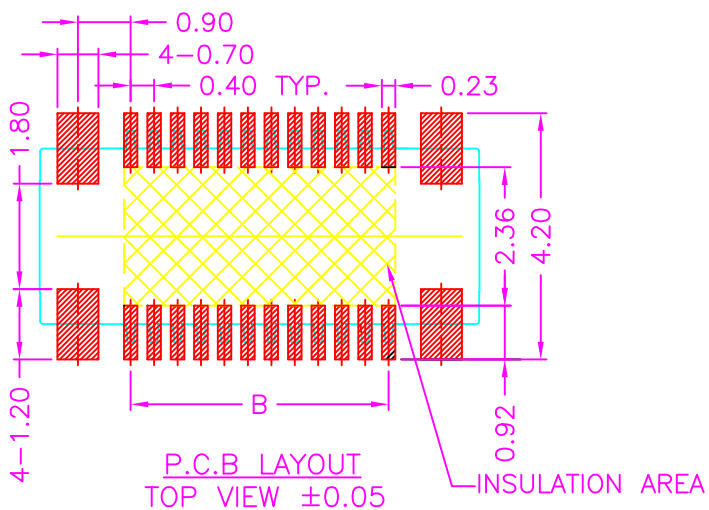

MATting WITH DRAWING NO: 1BBEC-002



Cyberconn Technology Co., Ltd.
www.cyberconn.com.tw Tel+886-3-4951314

TOLERANCES	BOARD TO BOARD CONNECTOR SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°	TITLE	BTB, 0.40mm PITCH, PCB MOUNT, SMT, FEMALE WITH PAD, METING HEIGHT 1.00mm				
	DRAWN BY	CHECKED BY		APPROVED BY		
	Tina	Lion		Benson		
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10165	MM	NONE	A4	1BBEC-001	A 1/1	

A	RELEASE	2014.9.12
REV.	DESCRIPTION	DATE