

F

F

E

E

D

D

C





C

B

B

A

A

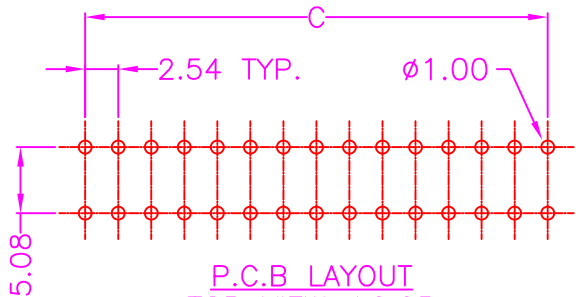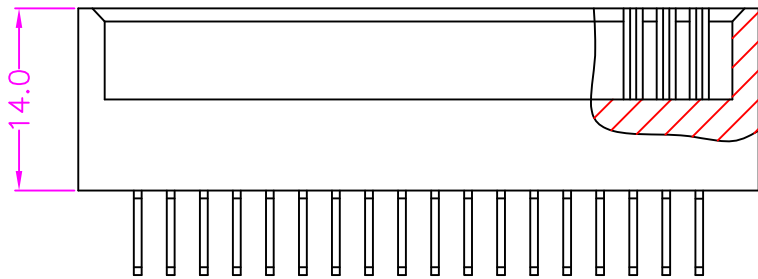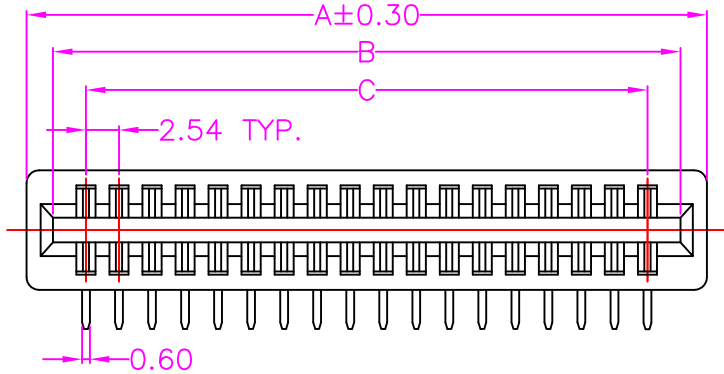

P.C.B. LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: PBT (UL 94V-0)
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 3 AMP MAX
DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
CONTACT RESISTANCE: 20m OHMS MAX
INSULATION RESISTANCE: 5000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -55°C~+85°C

Pin	A	B	C	Pin	A	B	C
6	14.22	10.66	5.08	40	57.40	53.84	48.26
8	16.76	13.20	7.62	42	59.94	56.38	50.80
10	19.30	15.74	10.16	44	62.48	58.92	53.34
12	21.84	18.28	12.70	46	65.02	61.46	55.88
14	24.38	20.82	15.24	48	67.56	64.00	58.42
16	26.92	23.36	17.78	50	70.10	66.54	60.96
18	29.46	25.90	20.32	52	72.64	69.08	63.50
20	32.00	28.44	22.86	54	75.18	71.62	66.04
22	34.54	30.98	25.40	56	77.72	74.16	68.58
24	37.08	33.52	27.94	58	80.26	76.70	71.12
26	39.62	36.06	30.48	60	82.80	79.24	73.66
28	42.16	38.60	33.02	62	85.34	81.78	76.20
30	44.70	41.14	35.56	64	87.88	84.32	78.74
32	47.24	43.68	38.10	66	90.42	86.86	81.28
34	49.78	46.22	40.64	68	92.96	89.40	83.82
36	52.32	48.76	43.18	70	95.50	91.94	86.36
38	54.86	51.30	45.72	72	98.04	94.48	88.90

TABLE 1

PART NUMBER:
4CECH - * * * T - 1 5 1

SERIES NO. OF POS. TIN PLATING ON SOLDER TAIL BOX PACKAGE

CONTACT PLATED OPTION
1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
7: 15u" GOLD
9: 30u" GOLD

Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314						
TOLERANCES	TITLE	CARD EDGE CONNECTOR SERIES				
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		ISA (CARD EDGE), 2.54mm PITCH, PCB MOUNT R/A END KEY, FEMALE				
	DRAWN BY		CHECKED BY		APPROVED BY	
	Janice		Lion		Benson	
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10036	MM	NONE	A4	4CECH-001 A	1/1

A	RELEASE	2013.6.21
REV.	DESCRIPTION	DATE