
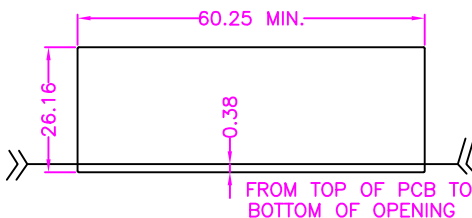
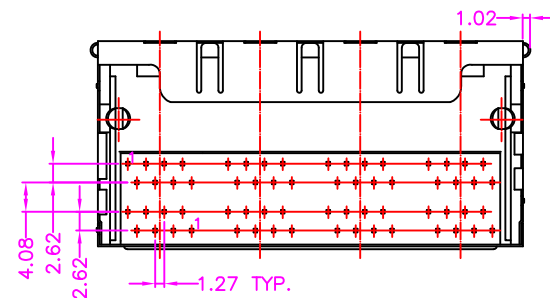
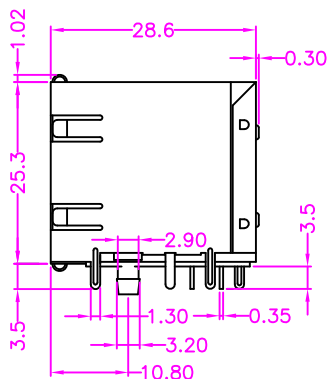


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

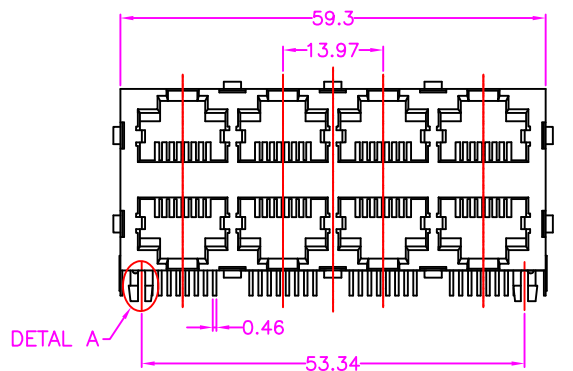


RECOMMENDED SUGGESTED PANEL CUTOUT

PART NUMBER:
3MJDD - 2 4 8 8 * - 1 1 7

SERIES — 2X4 PORT — 8 POSITION & 8 CONTACT — TRAY PACKAGE — CONTACT PLATED OPTION

- 1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
7: 15u" GOLD
9: 30u" GOLD
10: 50u" GOLD
11: 6u" GOLD

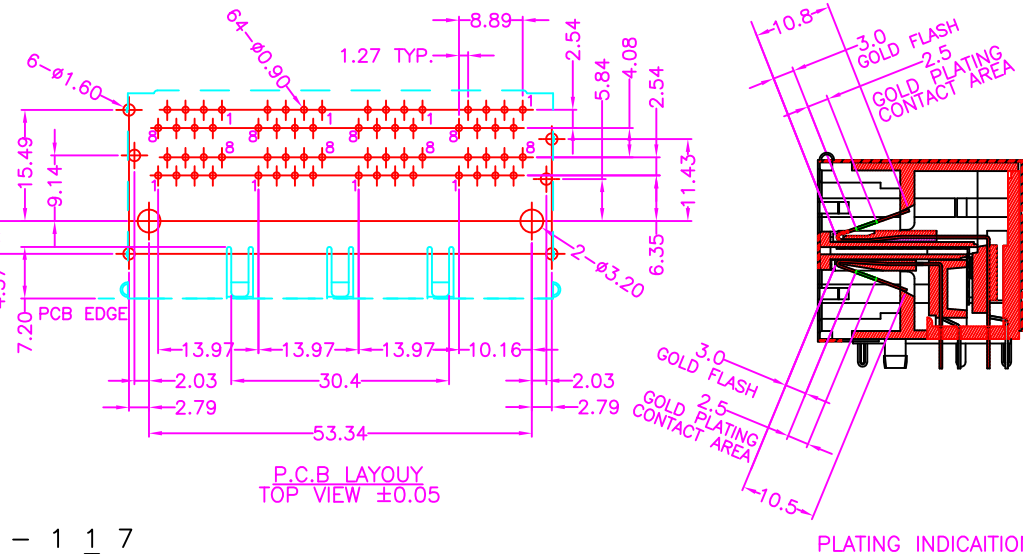

P.C.B. LAYOUT
TOP VIEW ±0.05

PLATING INDICATION

A	RELEASE	2014.9.5
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel +886-3-4951314									
TOLERANCES		MODULAR JACK SERIES							
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE	2X4 STACKED RJ45, PCB MOUNT, SIDE ENTRY METAL SHIELD, WITH SPRING						
		DRAWN BY		CHECKED BY		APPROVED BY			
		Tina		Lion		Benson			
10006&10058		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet		
		MM	NONE	A4	3MJDD-007	A	1/1		