

### MATERIALS

HOUSING: LCP (UL 94V-0), BLACK  
 LATCH: STAINLESS STEEL, TIN PLATING  
 BOARDLOCK: COPPER ALLOY, TIN PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

### SPECIFICATION

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -55°C~+85°C




PART NUMBER:  
**4MSLG - 1 2 4 \* T - 1 1 1**

SERIES — NO. OF POS. — TAPE REEL PACKAGE  
 CONTACT PLATED OPTION — TIN PLATING ON SOLDER TAIL

1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 7: 15u" GOLD  
 9: 30u" GOLD

<b>Cyberconn Technology Co., Ltd.</b> <small>www.cyberconn.com.tw Tel:+886-3-4951314</small>						
TOLERANCES		CARD EDGE CONNECTOR SERIES				
X.X ±0.3		TITLE MINI PCI SOCKET, 0.80mm PITCH, PCB MOUNT, SMT FEMALE, WITH LATCH & BOARDLOCK, HEIGHT=15.5mm				
X.XX ±0.2		DRAWN BY		CHECKED BY		APPROVED BY
X.XXX ±0.1		Tina		Lion		Benson
Angle ±5°		UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
		10174	MM	NONE	A4	4MSLG-001 A 1/2

A	RELEASE	2015.7.27
REV.	DESCRIPTION	DATE

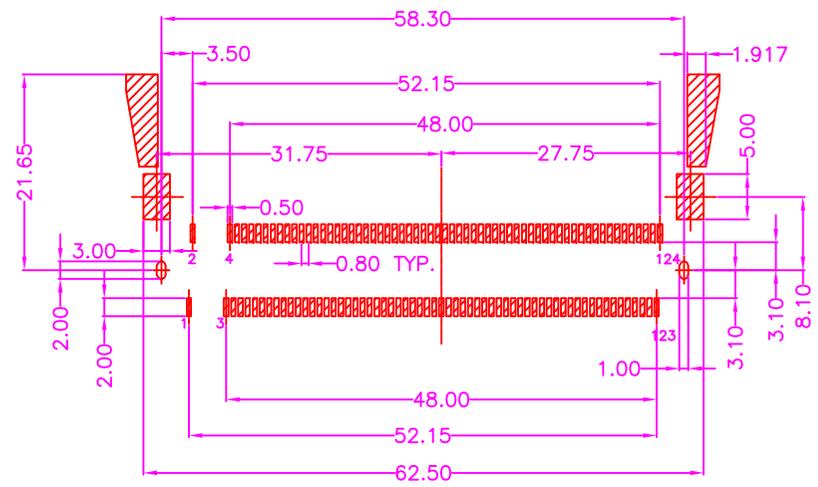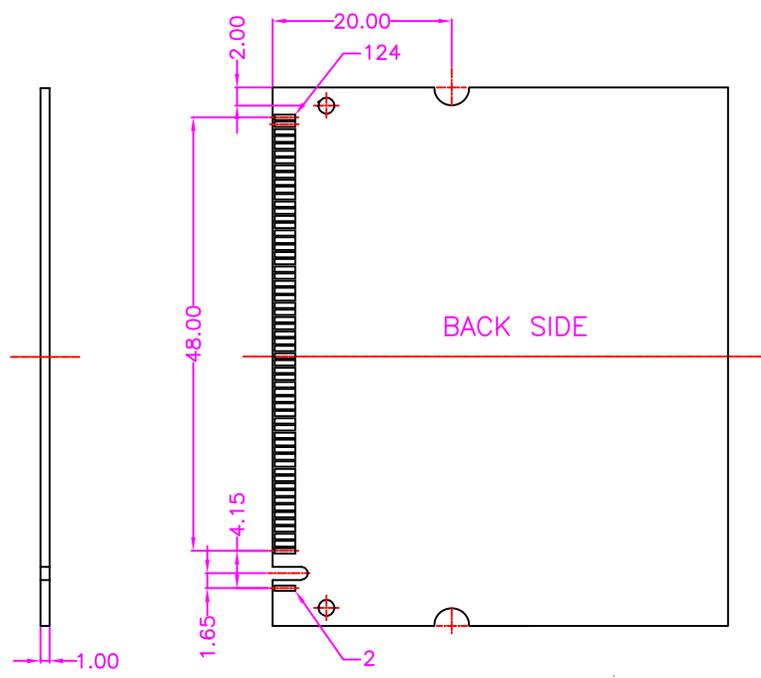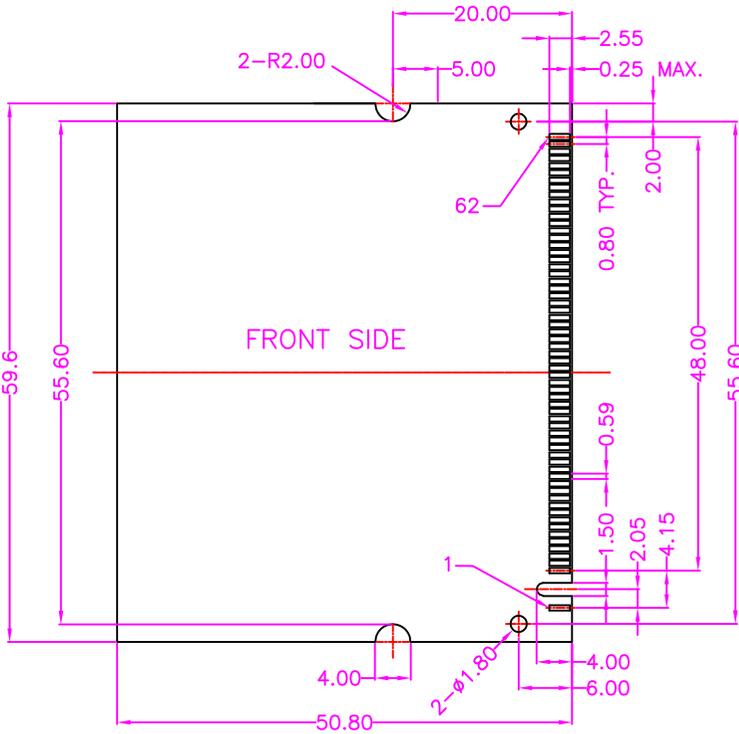

A	RELEASE	2015.7.27
REV.	DESCRIPTION	DATE

**Cyberconn Technology Co., Ltd.**  
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	CARD EDGE CONNECTOR SERIES				
X.X ±0.3	TITLE MINI PCI SOCKET, 0.80mm PITCH, PCB MOUNT, SMT FEMALE, WITH LATCH & BOARDLOCK, HEIGHT=15.5mm				
X.XX ±0.2	DRAWN BY	CHECKED BY	APPROVED BY		
X.XXX ±0.1	<i>Tina</i>	<i>Lion</i>	<i>Benson</i>		
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.
	10174	MM	NONE	A4	4MSLG-001
					Sheet
					2/2