
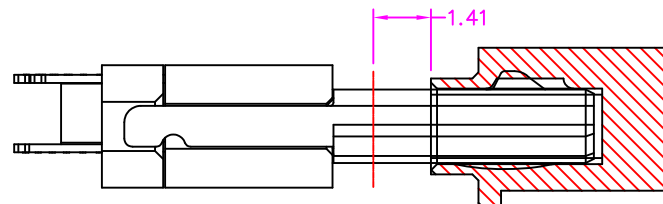
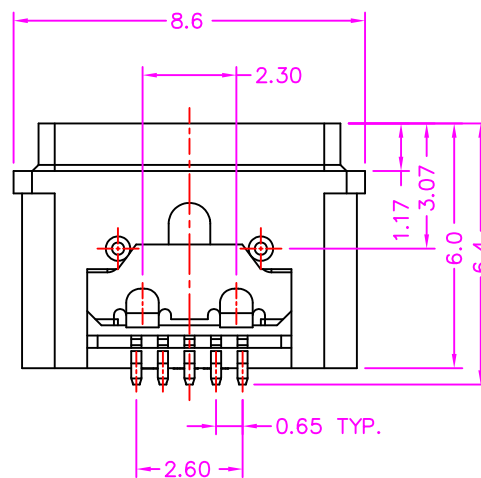


SECTION A-A

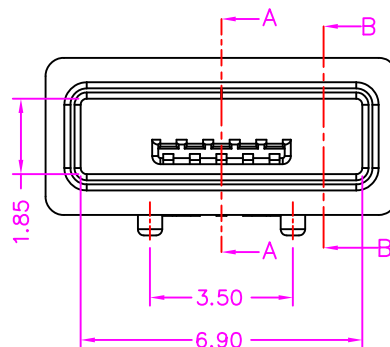

SECTION B-B

ASSEMBLY DRAWING

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: SUS, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C+85°C

PART NUMBER:

2USUV - 0 5 * - 1 2 1


SERIES

NO. OF POS.

TAPE REEL PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

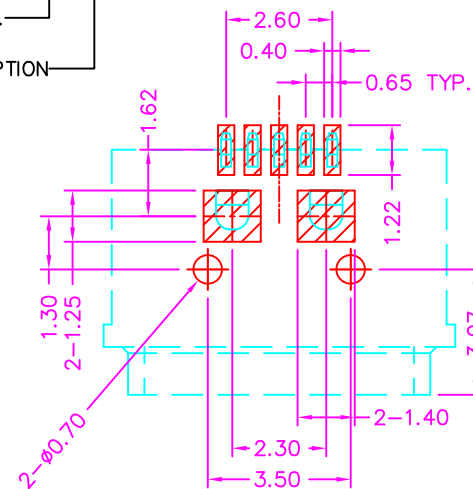P.C.B. LAYOUT
TOP VIEW ±0.05

Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		USB CONNECTOR SERIES							
X.X ±0.3		TITLE	MICRO USB AB TYPE, WATERPROOF, PCB MOUNT, SMT						
X.XX ±0.2			REVERSE TYPE, METAL SHIELD, FEMALE WITH POST						
X.XXX ±0.1			DRAWN BY		CHECKED BY		APPROVED BY		
Angle ±5°									
		Tina		Lion		Benson			
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet		
10140		MM	NONE	A4	2USUV-001	A	1/1		