
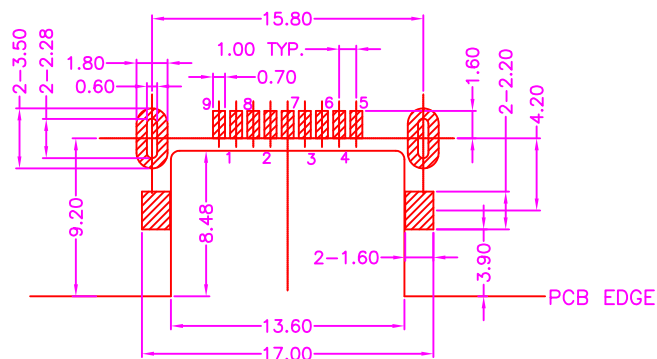
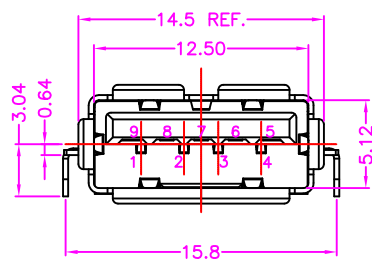

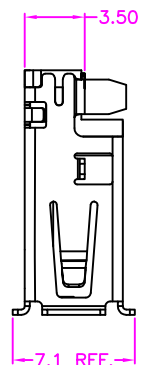
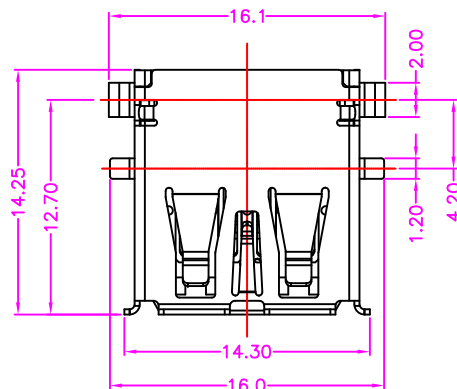




P.C.B. LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: LCP (UL 94V-0)

SHELL: COPPER ALLOY, NICKEL PLATING

TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

PART NUMBER:

2USED - 09 * T - 1 * 2

SERIES

NO. OF POS.

PACKAGE OPTION

1: TRAY

2: TAPE REEL

CONTACT PLATED OPTION

TIN PLATING ON SOLDER TAIL

1: GOLD FLASH

3: 3u" GOLD


5: 5u" GOLD

6: 10u" GOLD

7: 15u" GOLD

9: 30u" GOLD

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSTX-
6	StdA_SSTX+
7	GND_DRAIN
8	StdA_SSRX-
9	StdA_SSRX+
Shell	Shield

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314										
TOLERANCES		TITLE	USB CONNECTOR SERIES							
X.X ±0.3			USB 3.0 A TYPE, PCB MOUNT, SMT MID MOUNT METAL SHIELD FEMALE							
X.XX ±0.2										
X.XXX ±0.1										
Angle ±5°		DRAWN BY		CHECKED BY			APPROVED BY			
		Janice		Lion			Benson			
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet			
10057&10152		MM	NONE	A4	2USED-002	B	1/1			

B	MODIFY DRAW.	2015.9.2
A	RELEASE	2012.6.1
REV.	DESCRIPTION	DATE