
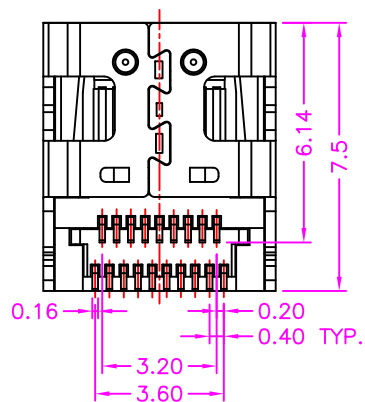
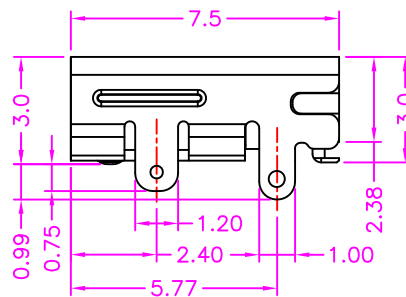
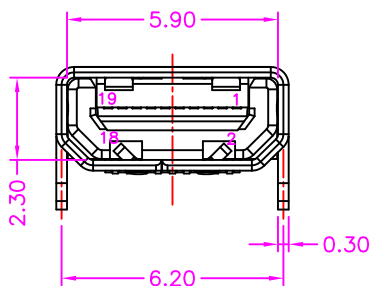


MYLAR

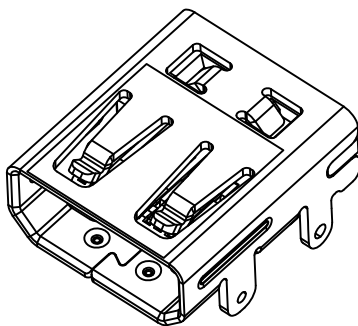

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.8 AMP MAX
DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
CONTACT RESISTANCE: 10m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -30°C~+85°C

PART NUMBER:

2HDLA - 1 9 * T - 1 2 2

SERIES


NO. OF POS.

CONTACT PLATED OPTION

TAPE REEL PACKAGE

TIN PLATING ON SOLDER TAIL

1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
7: 15u" GOLD
9: 30u" GOLD

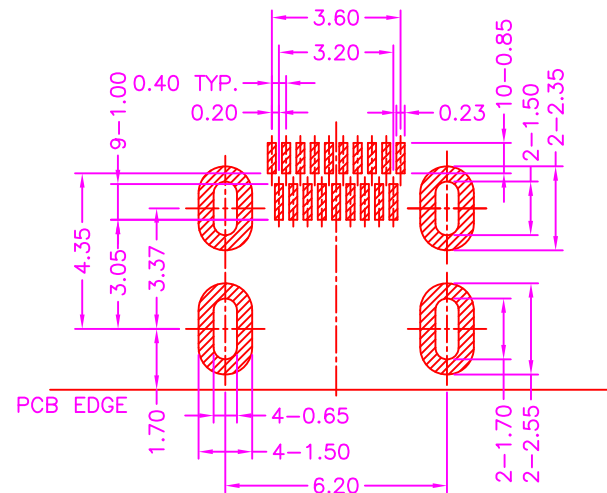

P.C.B LAYOUT
TOP VIEW ±0.05




Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314


TOLERANCES		HDMI CONNECTOR SERIES						
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE	HDMI, D TYPE, 0.40mm PITCH, PCB MOUNT SMT, METAL SHIELD, FEMALE WITH MYLAR					
			DRAWN BY		CHECKED BY		APPROVED BY	
			Tina		Lion		Benson	
			UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
10096		MM	NONE	A4	2HDLA-002	A	1/2	

A	RELEASE	2014.11.27
REV.	DESCRIPTION	DATE

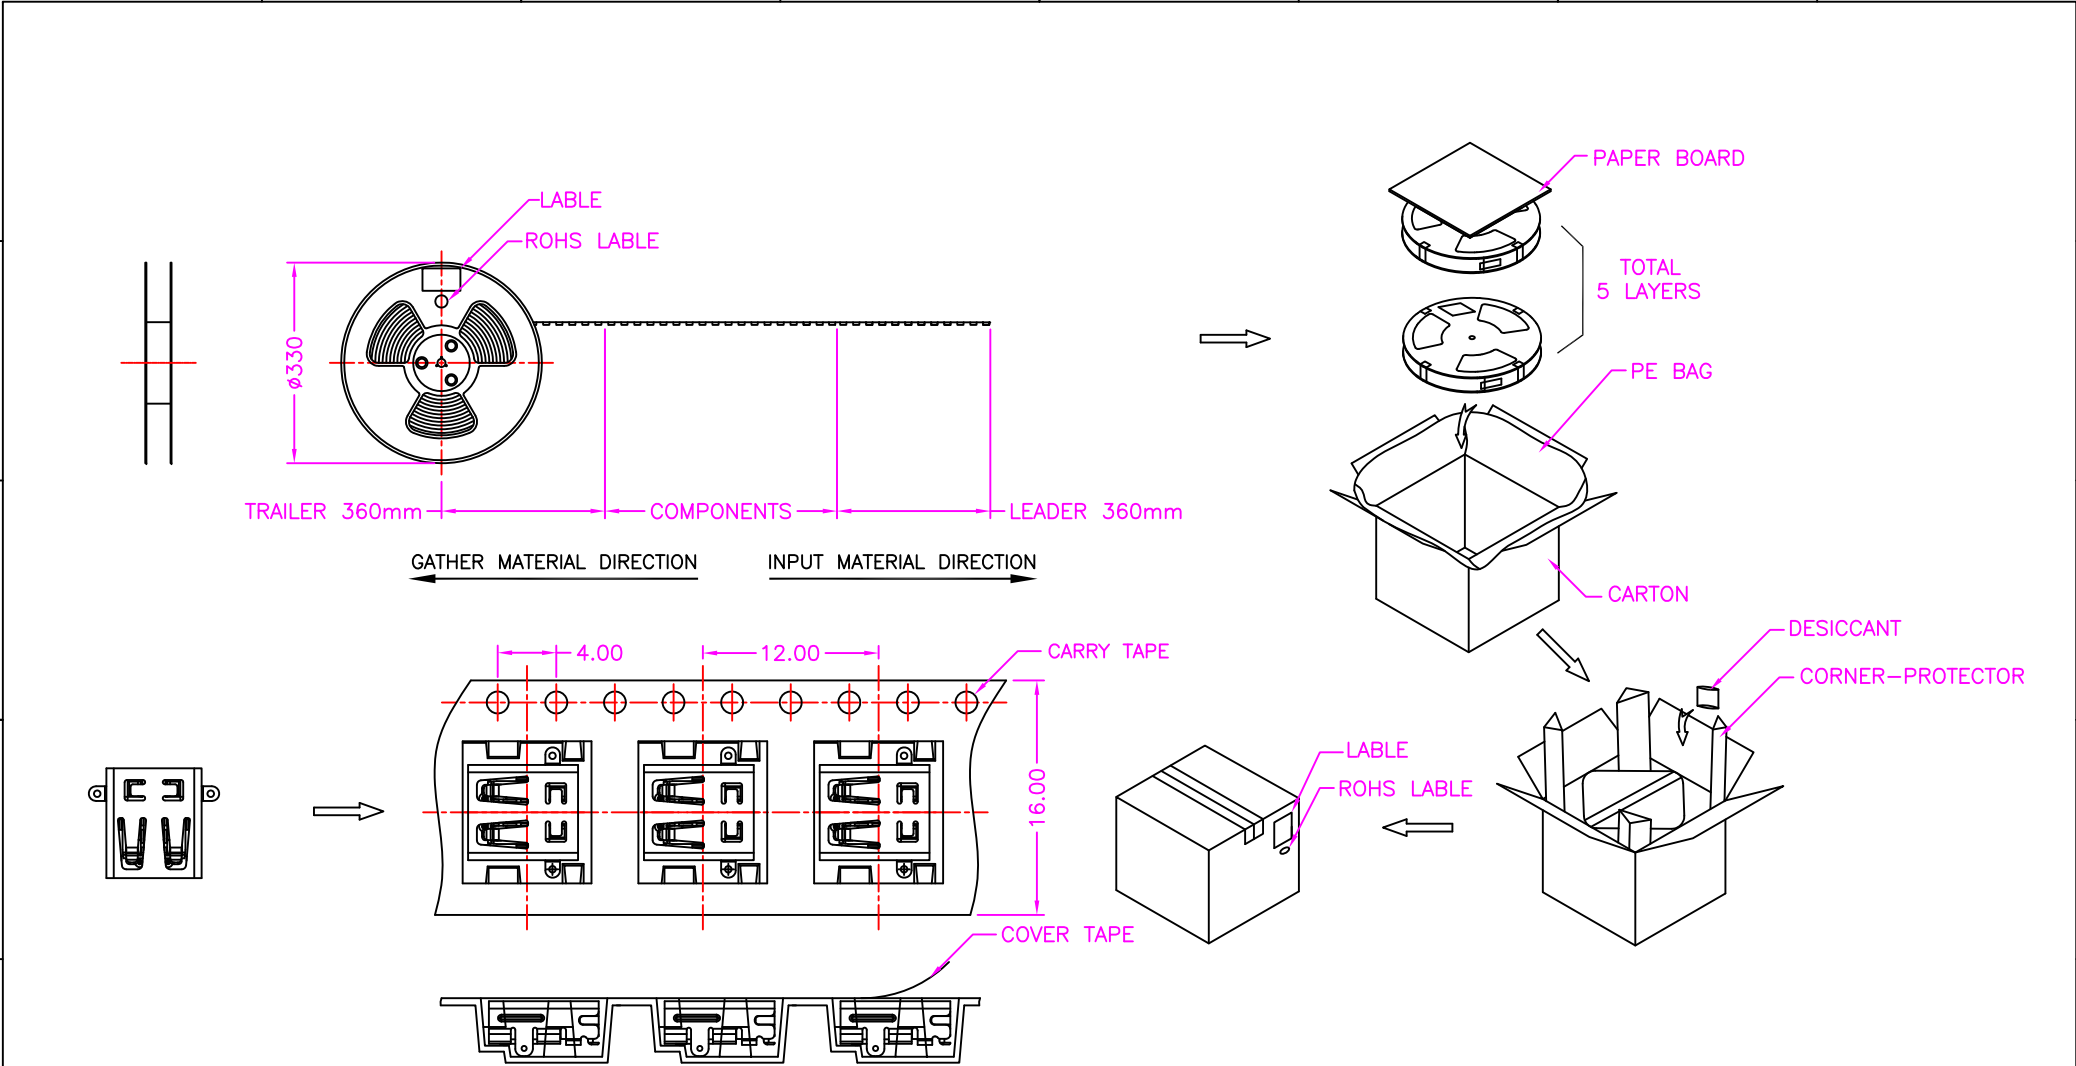

NOTE: 1200PCS/REEL, 5REEL/CARTON, 6000PCS/CARTON

A	RELEASE	2014.11.27
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314							
TOLERANCES		TITLE	HDMI CONNECTOR SERIES				
X.X ±0.3			HDMI, D TYPE, 0.40mm PITCH, PCB MOUNT SMT, METAL SHIELD, FEMALE WITH MYLAR				
X.XX ±0.2							
X.XXX±0.1							
Angle ±5°		DRAWN BY		CHECKED BY		APPROVED BY	
		Tina		Lion		Benson	
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet		
10096	MM	NONE	A4	2HDLA-002	A	2/2	