

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -0°C~+70°C

PART NUMBER:

3MJDT - 2 8 8 8 * - 1 1 A

SERIES




2X8 PORT

8 POSITION & 8 CONTACT


TRAY PACKAGE

TERMINAL PLATED OPTION


- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD
- 11: 6u" GOLD

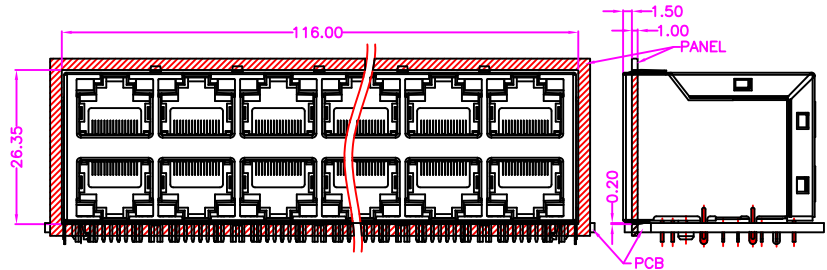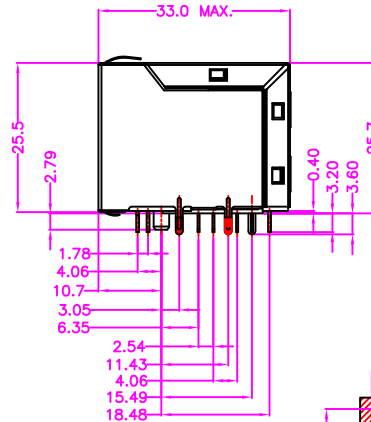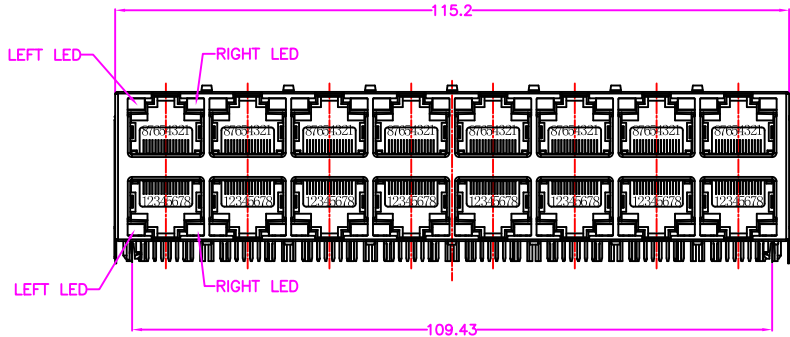

Recommended panel cutout and
bezel opening below top of PCB

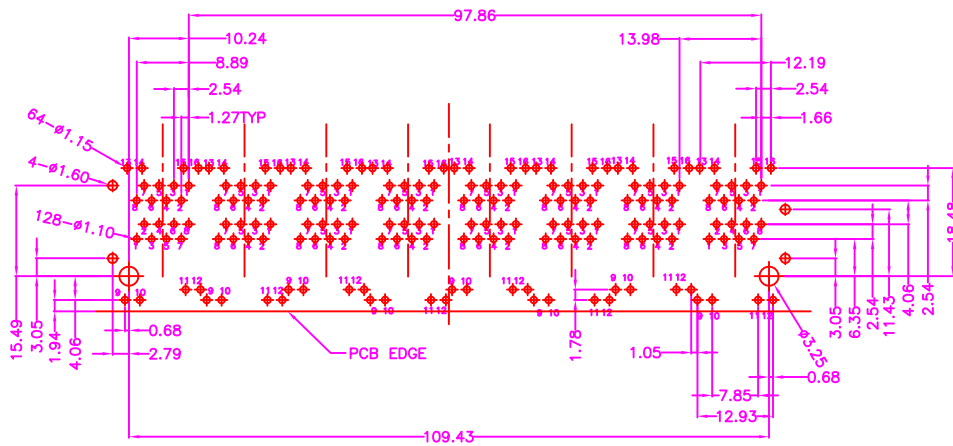

P.C.B LAYOUT
TOP VIEW ±0.05




LED PIN DEFINE



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		MODULAR JACK SERIES							
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE	2x8 STACKED RJ45, PCB MOUNT, SIDE ENTRY METAL SHIELD, WITH SPRING & LED						
			DRAWN BY		CHECKED BY		APPROVED BY		
		Tina		Lion		Benson			
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet		
10178		MM	NONE	A4	3MJDT-010	A	1/1		

A	RELEASE	2015.3.13
REV.	DESCRIPTION	DATE