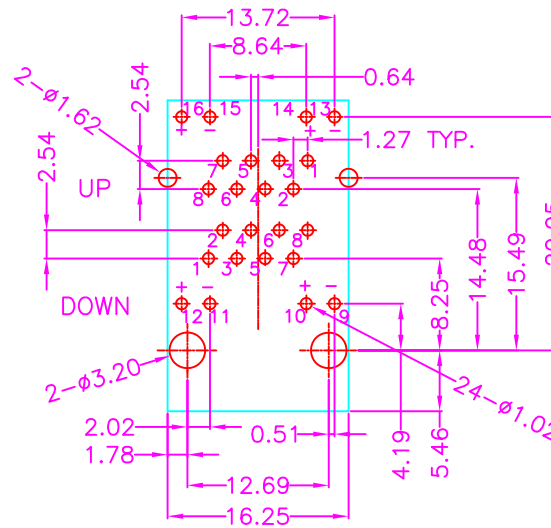
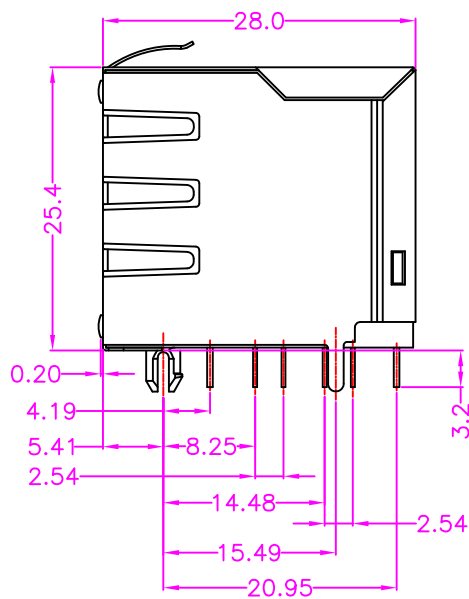
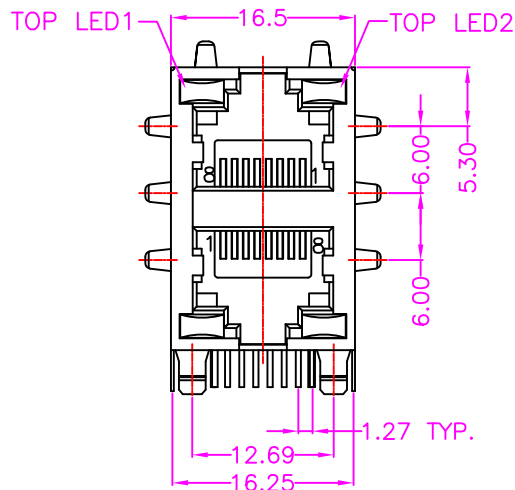


P.C.B LAYOUT
TOP VIEW ±0.05

PART NUMBER:

3MJDT - 2 1 8 8 * - 1 1 4 *

SERIES

2X1 PORT

8 POSITION & 8 CONTACT

LED OPTION
REF. TABLE 1

TRAY PACKAGE

TERMINAL PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD
- 11: 6u" GOLD

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -0°C~+70°C



DUAL LIGHT

SINGLE LIGHT

LED SCHEMATIC

TABLE 1

LED OPTION

P/N	LED 1	LED 2
1	YELLOW	GREEN
2	GREEN	YELLOW
3	YELLOW	YELLOW
4	GREEN	GREEN
5	GREEN/ ORANGE	YELLOW
6	GREEN/ YELLOW	YELLOW



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		MODULAR JACK SERIES				
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°		TITLE	2x1 STACKED RJ45, PCB MOUNT, SIDE ENTRY METAL SHIELD, WITH SPRING & LED			
		DRAWN BY		CHECKED BY		APPROVED BY
		Janice		Lion		Benson
10003		UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
		MM	NONE	A4	3MJDT-004	A 1/1

A	RELEASE	2013.3.12
REV.	DESCRIPTION	DATE