

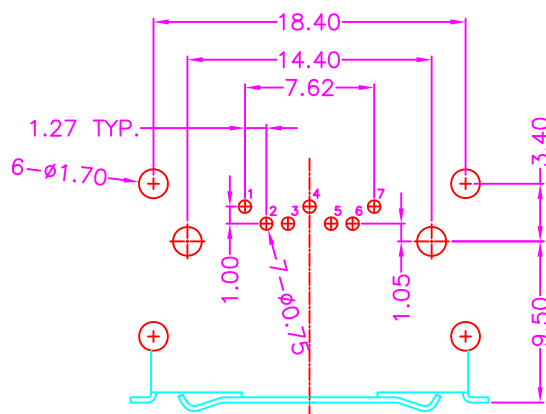
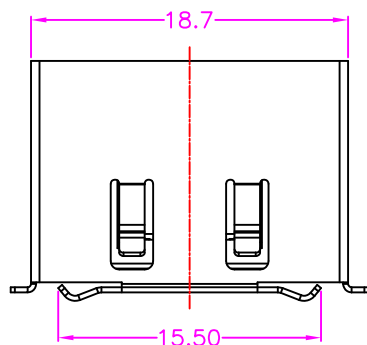
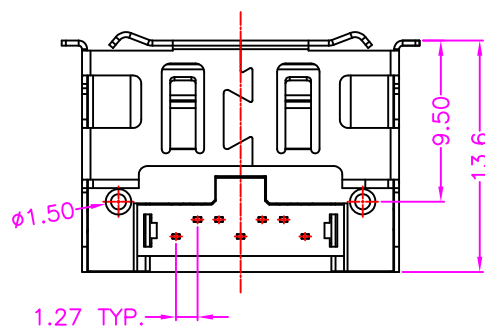


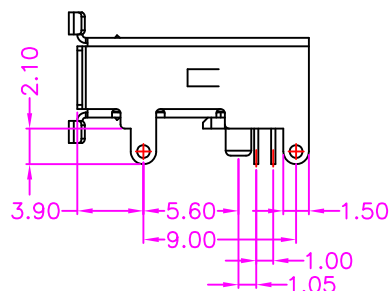

P.C.B LAYOUT
TOP VIEW ±0.05

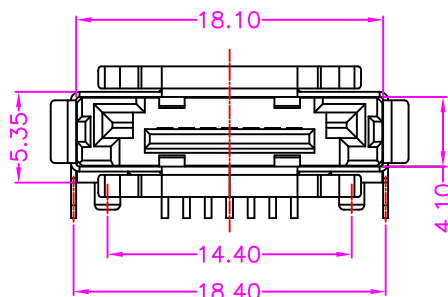

MATERIALS

HOUSING: LCP (UL 94V-0)

SHELL: COPPER ALLOY, NICKEL PLATING

TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: $-55^{\circ}\text{C}\sim+85^{\circ}\text{C}$

PART NUMBER:

2SACD - 0 7 * T - 1 1 3

SERIES:

NO. OF POS.:

— TRAY PACKAGE

— TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

1: GOLD FLASH

3: 3u" GOLD

5: 5u" GOLD

6: 10u" GOLD

9: 30u" GOLD



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel: +886-3-4951314

TOLERANCES		SATA CONNECTOR SERIES						
X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1 Angle $\pm 5^\circ$		TITLE		E-SATA, 7PIN, PCB MOUNT, R/A, METAL SHIELD FEMALE WITH POST & SPRING				
		DRAWN BY		CHECKED BY		APPROVED BY		
		Janice		Lion		Benson		
10187		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
		MM	NONE	A4	2SACD-003	A	1/1	