
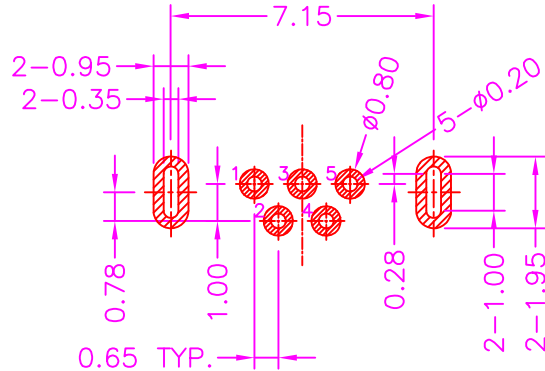
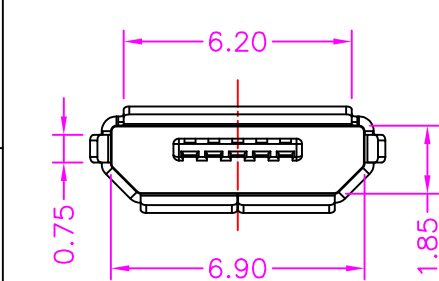


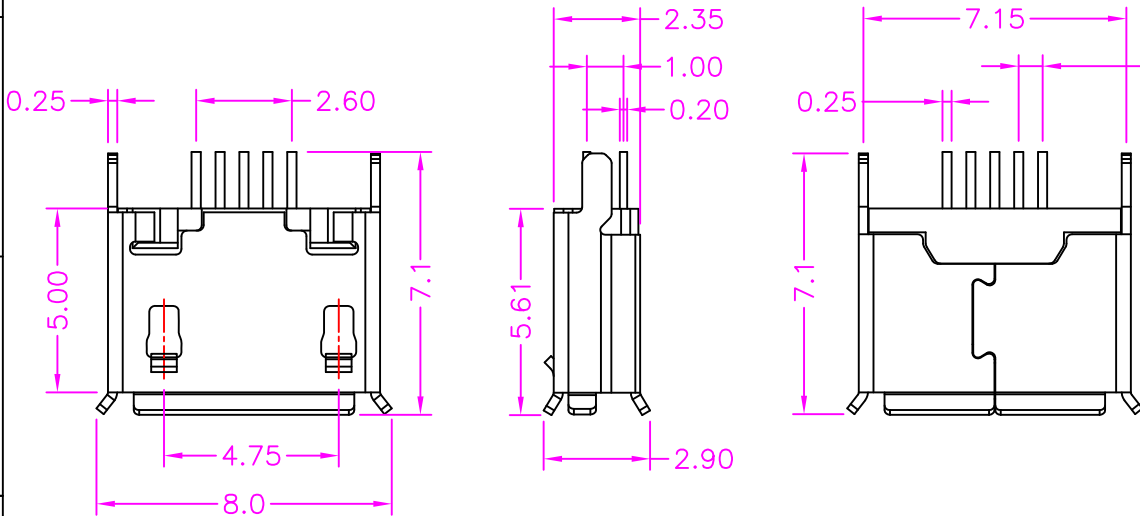

P.C.B LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: LCP (UL 94V-0)
SHELL: COPPER ALLOY, NICKLE PLATING
TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+85°C

PART NUMBER:

2USTH - 0 5 * T - 1 * 4

SERIES

NO. OF POS.

PACKAGE OPTION

1: TRAY
2: TAPE REEL

CONTACT PLATED OPTION

TIN PLATING ON SOLDER TAIL

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		USB CONNECTOR SERIES						
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE		MICRO USB B TYPE, VERTICAL TYPE, METAL SHIELD FEMALE				
		DRAWN BY		CHECKED BY		APPROVED BY		
		Tina		Lion		Benson		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10147		MM	NONE	A4	2USTH-004	A	1/1	

A	RELEASE	2015.11.13
REV.	DESCRIPTION	DATE