
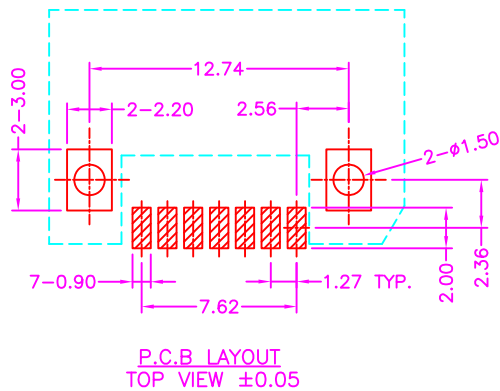
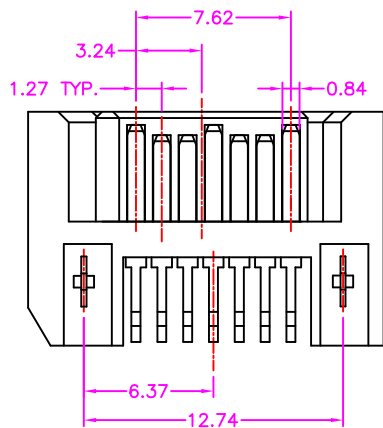

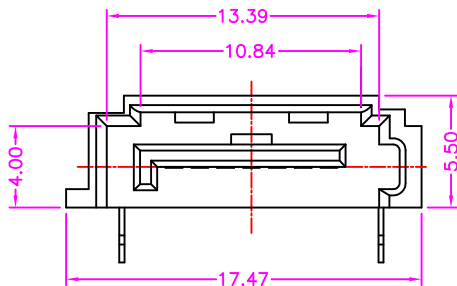


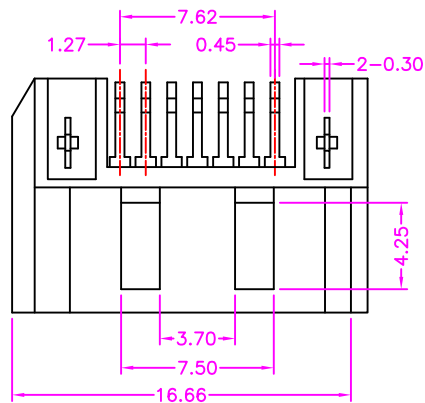

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
BOARD LOCK: COPPER ALLOY, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -55°C~+105°C

PART NUMBER:

2SAFF - 0 7 * T - 2 3 0

SERIES

TUBE PACKAGE

NO. OF POS.

TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES		SATA CONNECTOR SERIES								
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE	SATA 7PIN, PCB MOUNT, SMT, ALL PLASTIC HALF COVER, WITH BOARDLOCK, MALE							
			DRAWN BY		CHECKED BY		APPROVED BY			
			Janice		Lion		Benson			
			UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet		
10072		MM	NONE	A4	2SAFF-001		A		1/1	

A	RELEASE	2011.9.20
REV.	DESCRIPTION	DATE