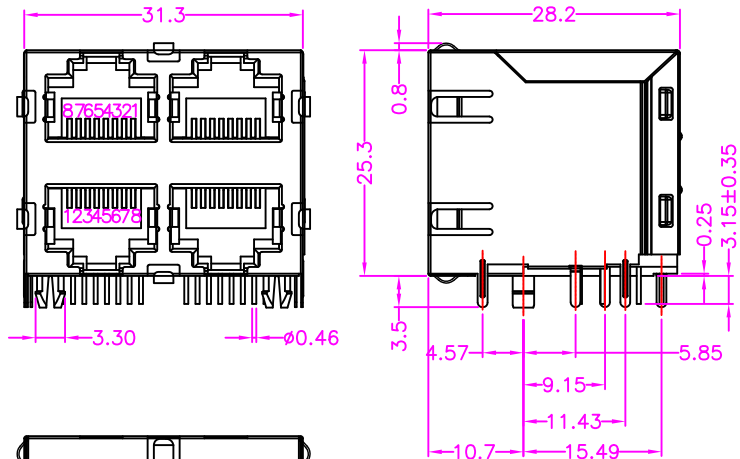


NOTE:

RJ45 CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
SHIELD: COPPER ALLOY, NICKEL PLATING
TERMINAL: Ø0.46mm, COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:

3MJDD - 2 2 8 8 * - 1 1 A

SERIES



2X2 PORT

8 POSITION & 8 CONTACT


TRAY PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD
- 11: 6u" GOLD

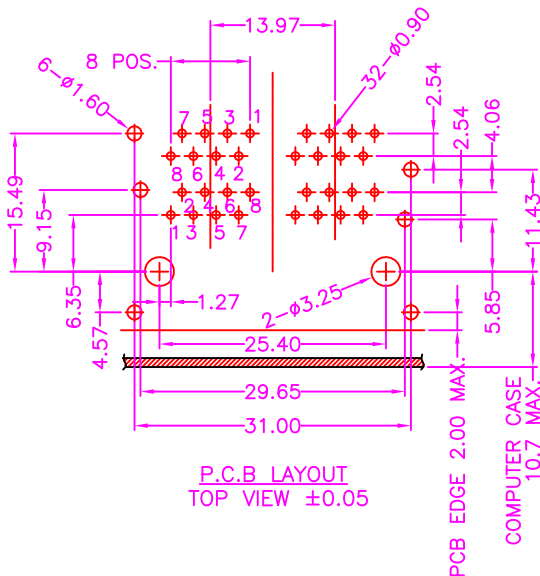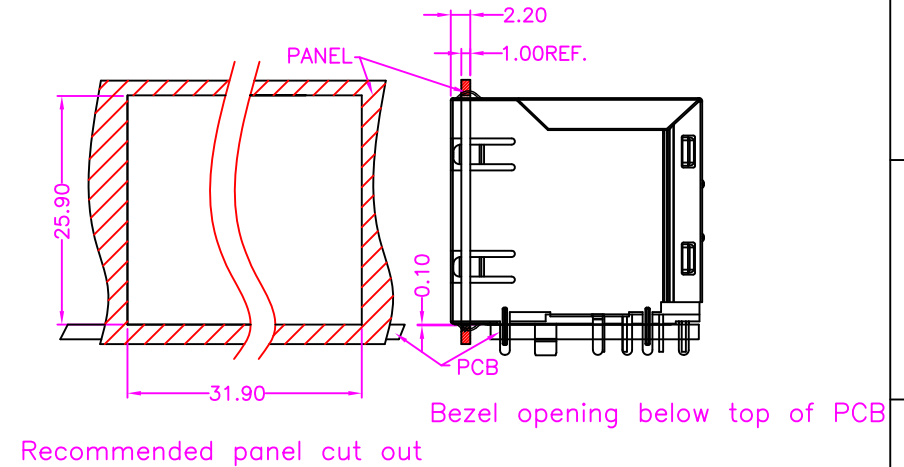

A	RELEASE	2015.10.20
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel: +886-3-4951314						
TOLERANCES	MODULAR JACK SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	TITLE	2X2 STACKED RJ45, PCB MOUNT, SIDE ENTRY METAL SHIELD WITH SPRING				
	DRAWN BY	CHECKED BY		APPROVED BY		
	Tina	Lion		Benson		
10178	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	MM	NONE	A4	3MJDD-010	A	1/1