

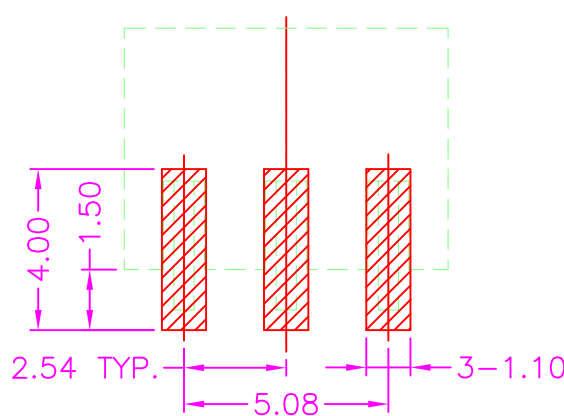



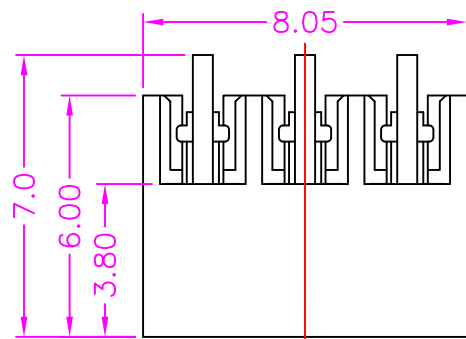


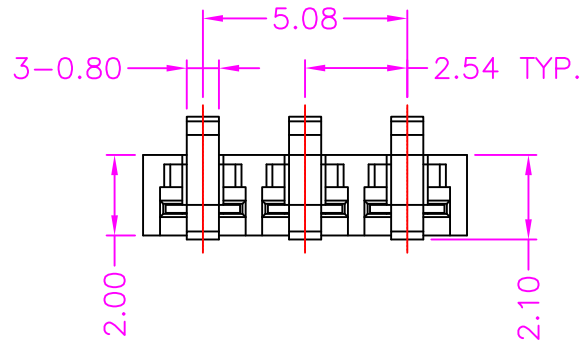

P.C.B LAYOUT
TOP VIEW ±0.05



USE GUIDE

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, 5u" GOLD PLATED

SPECIFICATION

CURRENT RATING: 3 AMP MAX
DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+80°C

PART NUMBER:

1BTBG - 0 3 * - 1 2 1

SERIES

NO. OF POS.

TAPE REEL

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES						
X.X	±0.3	TITLE BATTERY CONNECTOR SERIES BATTERY, 2.54mm PITCH, PCB MOUNT, SMT, FEMALE				
X.XX	±0.2					
X.XXX	±0.1					
Angle	±5°					
	DRAWN BY <i>Janice</i>		CHECKED BY <i>Lion</i>		APPROVED BY <i>Benson</i>	
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
10184	MM	NONE	A4	1BTBG-001	A	1/1