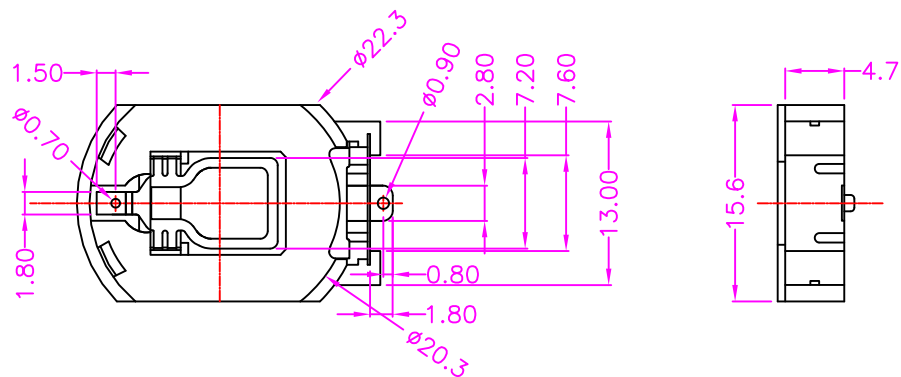




MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)

TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

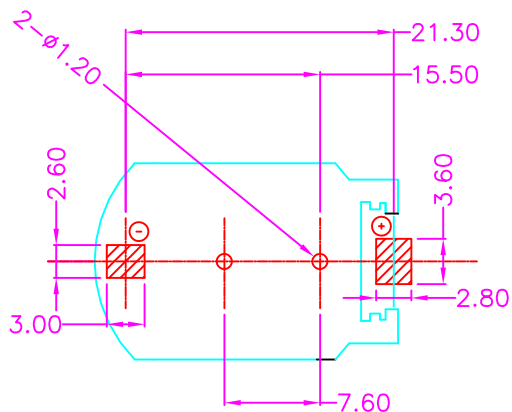
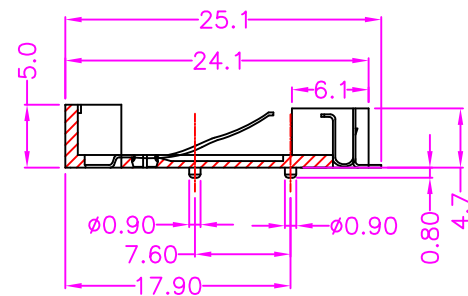
CURRENT RATING: 1.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 50m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -20°C~+80°C

P.C.B LAYOUT
TOP VIEW ±0.05

PART NUMBER:

1BTJA - 1 - 0 * 3

SERIES

GOLD PLATING ON TERMINAL

PACKAGE OPTION

1: TRAY

2: TAPE REEL



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel +886-3-4951314

TOLERANCES		TITLE	BATTERY CONNECTOR SERIES					
X.X ±0.3			BATTERY HOLDER, SMT, ALL PLASTIC, CR2032					
X.XX ±0.2								
X.XXX ±0.1								
Angle ±5°		DRAWN BY		CHECKED BY		APPROVED BY		
		Tina		Lion		Benson		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10121		MM	NONE	A4	1BTJA-003	A	1/1	

A	RELEASE	2016.12.7
REV.	DESCRIPTION	DATE