
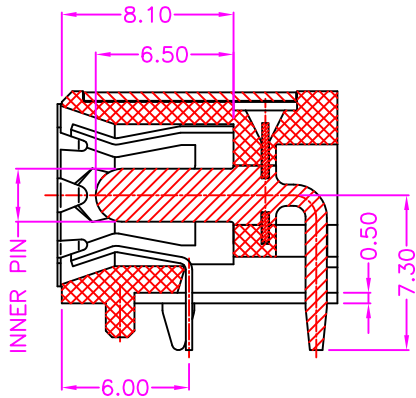





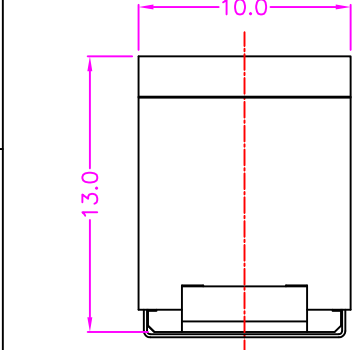


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
INNER PIN: COPPER ALLOY, 5u" SILVER PLATING
SHELL: SPCC, 20u" NICKEL PLATING
TERMINAL: COPPER ALLOY, 50u" Sn-Cu ALLOY PLATING

SPECIFICATION

CURRENT RATING: 54V, 5.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

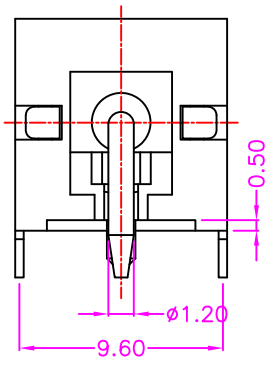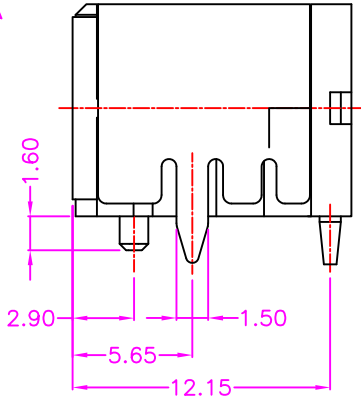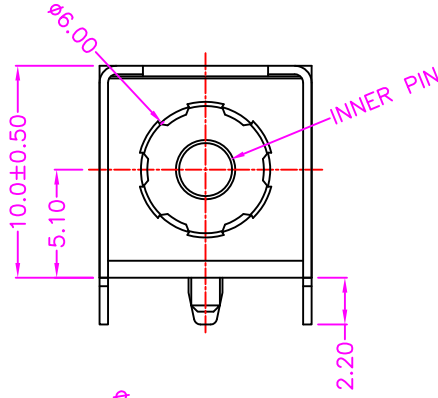

PART NUMBER:



3PJDB - * - 1 * 3

SERIES

INNER PIN OPTION
2: $\phi 2.50\text{mm}$
4: $\phi 2.00\text{mm}$

PACKAGE OPTION


- 1: TRAY
- 2: TAPE REEL
- 4: BAG

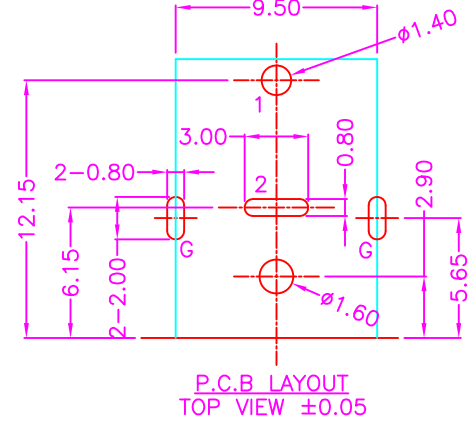

B	MODIFY DRAW.	2015.10.21
A	RELEASE	2015.9.4
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel +886-3-4951314									
TOLERANCES		DC POWER JACK CONNECTOR SERIES							
X.X ±0.3 X.XX ±0.2 X.XXX±0.1 Angle ±5°		TITLE	DC POWER JACK, PCB MOUNT, R/A, METAL SHIELD WITH POST, FEMALE						
		DRAWN BY		CHECKED BY		APPROVED BY			
		Tina		Lion		Benson			
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet		
10126		MM	NONE	A4	3PJDB-003	B	1/3		

NOTE: 100PCS/TRAY, 1200PCS/12 TRAY/INNER BOX
6000PCS/ 5 INNER BOX/ CARTON

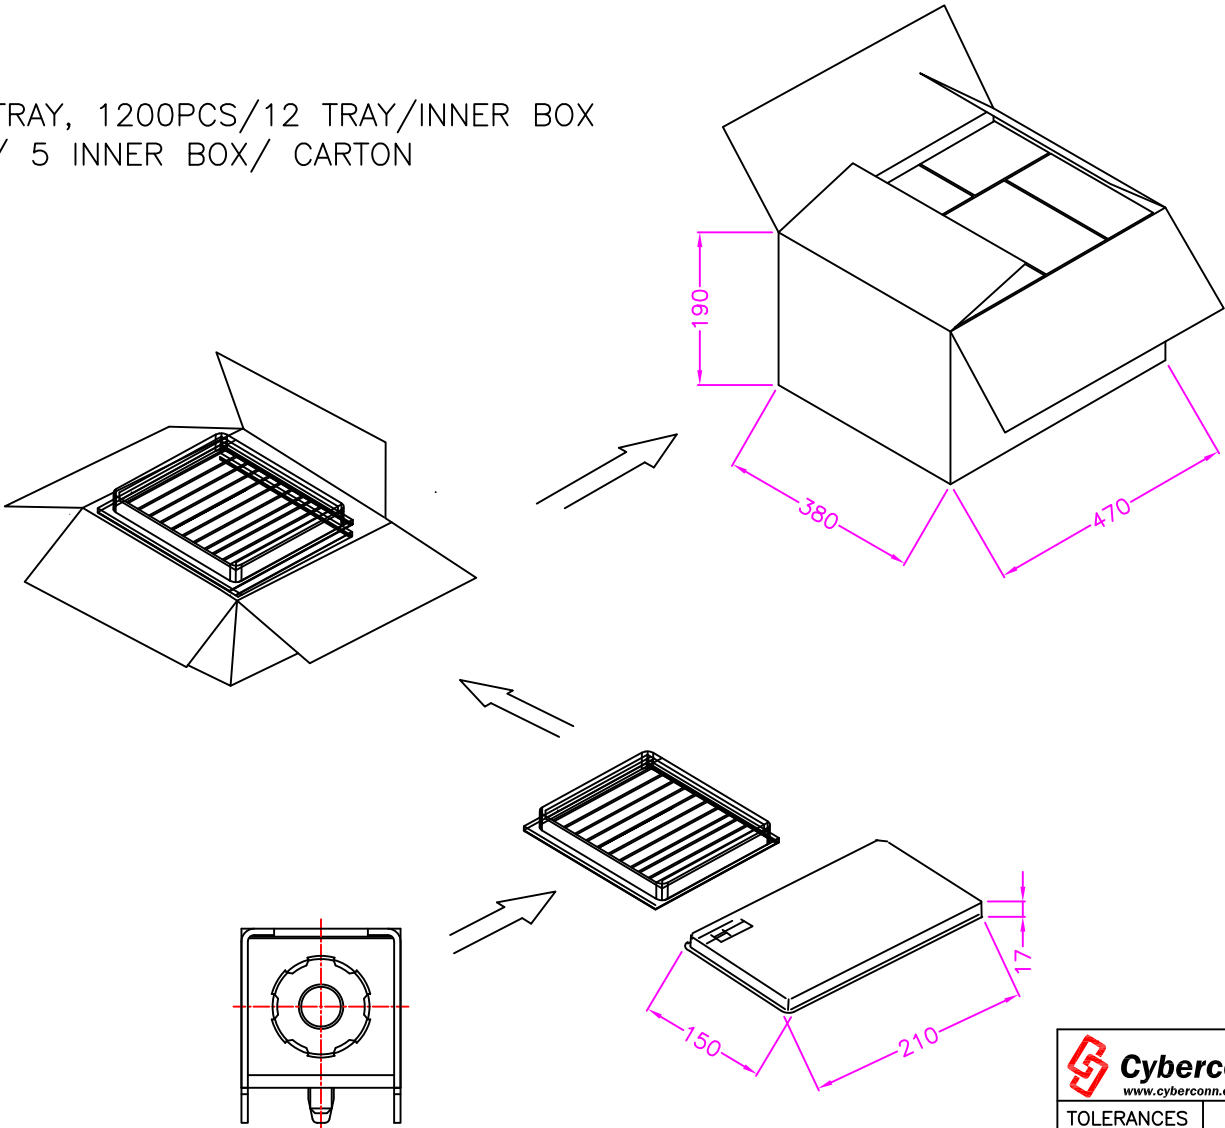

B	MODIFY DRAW.	2015.10.21
A	RELEASE	2015.9.4
REV.	DESCRIPTION	DATE











Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel+886-3-4951314

TOLERANCES	DC POWER JACK CONNECTOR SERIES						
X.X ±0.3	TITLE	DC POWER JACK, PCB MOUNT, R/A, METAL SHIELD WITH POST, FEMALE					
X.XX ±0.2							
X.XXX ±0.1							
Angle ±5°							
 	DRAWN BY		CHECKED BY		APPROVED BY		
	Tina		Lion		Benson		
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10126	MM	NONE	A4	3PJDB-003	B	2/3	

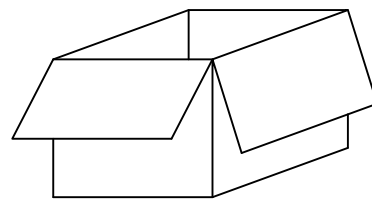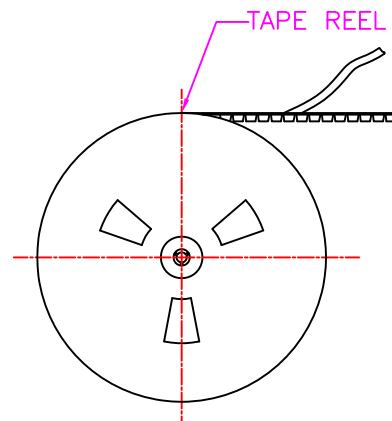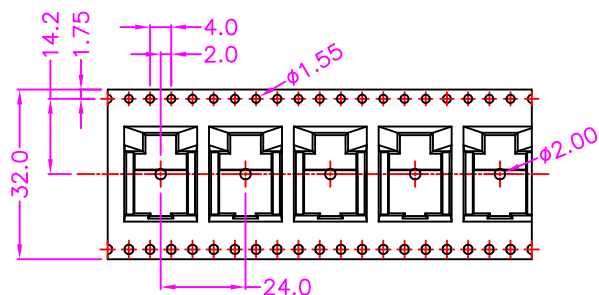

CARTON

NOTE: 200PCS/REEL, 2000PCS/10 REEL/CARTON

B	MODIFY DRAW.	2015.10.21
A	RELEASE	2015.9.4
REV.	DESCRIPTION	DATE

 Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel +886-3-4951314						
TOLERANCES	TITLE	DC POWER JACK CONNECTOR SERIES				
X.X ±0.3		DC POWER JACK, PCB MOUNT, R/A, METAL SHIELD WITH POST, FEMALE				
X.XX ±0.2						
X.XXX ±0.1						
Angle ±5°		DRAWN BY	CHECKED BY		APPROVED BY	
		Tina	Lion		Benson	
		UNIT	SCALE	SIZE	DRAW NO.	REV.
10126	MM	NONE	A4	3PJDB-003	B	3/3